

Logged in as Admin

- > Logout
- > Home
- > Software License
- > Admin Guide
- > FAQs
- > Data Summary
- > Users
 - > New Users
 - > Statistics
- > Abstracts
 - > Statistics
 - > Data Table
 - > Data Checking
- > Payment Proofs
- > Payment Invoice
- > Full Papers
- > Paper Review
 - > Statistics
 - > Data Table
- > Manage
 - > Result/Action
 - > Archive
- > Revised Papers
- > Copyright Transfers
- > Presentation Video
- > Online Q&A Forum
- > Certificate
 - > Presenter
 - > Non-Presenter
- > Time Series Graphs

:: User profile ::

<< back

Name	Dr. Aceng Sambas [Profiling GS Record Delete User]	
User ID	USER-327 (Activated on Monday, 20 July 2020)	
Email	<input type="text" value="acengs@umtas.ac.id"/>	
Login Code	<input type="text" value="xsZ9BTYban"/>	
Institution	Universitas Muhammadiyah Tasikmalaya	
Research	Dynamical System	
Participation	Presenter	
Postal address	Street	Tamansari Gobras Km. 2.5
	City	Tasikmalaya
	ZIP code	46196
	Country	Indonesia
Phone number		
Fax number		
Other information		

[Abstract ID: ABS-221]

[Search on Ifory](#)

A New 4-D Multi-Stable Hyperchaotic Two-Scroll System with No-Equilibrium and its Hyperchaos Synchronization

S. Vaidyanathan^{1,*}, C-H Lien², W. Fuadi³, Mujiarto⁴, M. Mamat⁵ and Subiyanto⁶

¹ Research and Development Centre, Vel Tech University, Avadi, Chennai, India
² Department of Marine Engineering, National Kaohsiung University of Science and Technology, Kaohsiung, 811, Taiwan, R.O.C.
³ Department of Informatic, Universitas Malikussaleh, Aceh Utara, Indonesia
⁴ Department of Mechanical Engineering, Universitas Muhammadiyah Tasikmalaya, Indonesia
⁵ Faculty of Informatics and Computing, Universiti Sultan Zainal Abidin, Kuala Terengganu, Malaysia
⁶ Department of Marine Science, Faculty of Fishery and Marine Science, Universitas Padjadjaran, Indonesia

Abstract

A new 4-D multi-stable hyperchaotic two-scroll system with four quadratic nonlinearities is proposed in this paper. The dynamical properties of the new hyperchaotic system are described in terms of finding equilibrium points, phase portraits, Lyapunov exponents, Kaplan-Yorke dimension, dissipativity, etc. We discover that the new hyperchaotic system has no equilibrium point and hence it exhibits a hidden attractor. Furthermore, we show that the new hyperchaos system has multi-stability by the coexistence of hyperchaotic attractors for different values of initial conditions. As a control application, we use integral sliding mode control (ISM) to derive new results for the hyperchaos synchronization of the new 4-D multi-stable hyperchaotic two-scroll system with hidden attractor. **(Approx. 110 words)**

Keywords: 4-D multi-stable, hyperchaotic two-scroll system

Topic: Engineering and Technology

Type: Oral Presentation

Info:

Abstract Review Result
Decision: Accepted

Topic: Engineering and Technology

Type: Oral Presentation

Info:


Abstract Review Result

Decision: Accepted

Comment:

[Get Letter of Acceptance](#) [Get Letter of Invitation](#)

[Get Certificate](#)
[See certificate sample](#)

 Need as PDF? Use Chrome Browser, [here is how](#)

URL JPCS-1477: <https://iopscience.iop.org/volume/1742-6596/1477>

URL pdf: <https://iopscience.iop.org/article/10.1088/1742-6596/1477/2/022018/pdf>

URI abstract: <https://iopscience.iop.org/article/10.1088/1742-6596/1477/2/022018>

Link indexing: <https://www.scimagojr.com/journalsearch.php?q=130053&tip=sid&clean=0>

[Print this page](#)

ICComSET 2019

The 2nd International Conference on Computer, Science,
Engineering and Technology

Universitas Muhammadiyah Tasikmalaya/Banten, 15-16 October 2019

Website: <http://www.2ndiccomset.umtas.ac.id>

Email: iccomset@umtas.ac.id

Date: 18 July 2019

Letter of Acceptance for Abstract

Dear Authors: S. Vaidyanathan^{1,*}, C-H Lien², W. Fuadi³, Mujiarto⁴, M. Mamat⁵ and Subiyanto⁶

We are pleased to inform you that your abstract (ABS-221, Oral Presentation), entitled:

"A New 4-D Multi-Stable Hyperchaotic Two-Scroll System with No-Equilibrium and its Hyperchaos Synchronization"

has been reviewed and accepted to be presented at ICComSET 2019 conference to be held on 15-16 October 2019, in Banten, Indonesia.

Please submit your full paper and make the payment for registration fee before the deadlines, visit our website for more information.

Thank You.

Best regards,

A handwritten signature in black ink, appearing to be 'Mujiarto', with a horizontal line underneath.

Dr. Mujiarto, S.T.,M.T.
ICComSET 2019 Chairperson

Konfrenzi.com - Conference Management System

[Print this page](#)

ICComSET 2019

The 2nd International Conference on Computer, Science,
Engineering and Technology

Universitas Muhammadiyah Tasikmalaya/Banten, 15-16 October 2019

Website: <http://www.2ndiccomset.umtas.ac.id>

Email: iccomset@umtas.ac.id

Date: 05 October 2019

Letter of Acceptance for Full Paper

Dear Authors: S. Vaidyanathan^{1,*}, C-H Lien², W. Fuadi³, Mujiarto⁴, M. Mamat⁵ and Subiyanto⁶

We are pleased to inform you that your paper, entitled:

"A New 4-D Multi-Stable Hyperchaotic Two-Scroll System with No-Equilibrium and its Hyperchaos Synchronization"

has been reviewed and accepted to be presented at ICComSET 2019 conference to be held on 15-16 October 2019 in Banten, Indonesia.

Please make the payment for registration fee before the deadlines, visit our website for more information.

Thank You.

Best regards,

A handwritten signature in black ink, appearing to be 'Mujiarto', with a horizontal line underneath.

Dr. Mujiarto, S.T.,M.T.
ICComSET 2019 Chairperson

Konfrenzi.com - Conference Management System

[Print this page](#)

ICComSET 2019

The 2nd International Conference on Computer, Science,
Engineering and Technology

Universitas Muhammadiyah Tasikmalaya/Banten, 15-16 October 2019

Website: <http://www.2ndiccomset.umtas.ac.id>

Email: iccomset@umtas.ac.id

Date: 10 September 2019

Letter of Invitation

Dear Authors: S. Vaidyanathan^{1,*}, C-H Lien², W. Fuadi³, Mujiarto⁴, M. Mamat⁵ and Subiyanto⁶

We are pleased to inform you that your abstract (ABS-221, Oral Presentation), entitled:

"A New 4-D Multi-Stable Hyperchaotic Two-Scroll System with No-Equilibrium and its Hyperchaos Synchronization"

has been reviewed and accepted to be presented at ICComSET 2019 conference to be held on 15-16 October 2019 in Banten, Indonesia.

We cordially invite you to attend our conference and present your research described in the abstract.

Please submit your full paper and make the payment for registration fee before the deadlines, visit our website for more information.

Thank You.

Best regards,

A handwritten signature in black ink, appearing to be 'Mujiarto', with a horizontal line underneath.

Dr. Mujiarto, S.T.,M.T.
ICComSET 2019 Chairperson

[Print this page](#)

ICComSET 2019

The 2nd International Conference on Computer, Science,
Engineering and Technology

Universitas Muhammadiyah Tasikmalaya/Banten, 15-16 October 2019

Website: <http://www.2ndiccomset.umtas.ac.id>

Email: iccomset@umtas.ac.id

Date: 10 September 2019

Letter of Invitation

Dear Authors: S. Vaidyanathan^{1,*}, C-H Lien², W. Fuadi³, Mujiarto⁴, M. Mamat⁵ and Subiyanto⁶

We are pleased to inform you that your paper, entitled:

"A New 4-D Multi-Stable Hyperchaotic Two-Scroll System with No-Equilibrium and its Hyperchaos Synchronization"

has been reviewed and accepted to be presented at ICComSET 2019 conference to be held on 15-16 October 2019 in Banten, Indonesia.

We cordially invite you to attend our conference and present your research described in the paper.

Please make the payment for registration fee before the deadlines, visit our website for more information.

Thank You.

Best regards,

A handwritten signature in black ink, appearing to read 'Mujiarto', with a horizontal line underneath.

Dr. Mujiarto, S.T.,M.T.
ICComSET 2019 Chairperson

Konfrenzi.com - Conference Management System

New 4-D Multi-Stable Hyperchaotic Two-Scroll System with No-Equilibrium and its Hyperchaos Synchronization

S. Vaidyanathan^{1,*}, C-H Lien², W. Fuadi³, Mujiarto⁴, M. Mamat⁵ and Subiyanto⁶¹ Research and Development Centre, Vel Tech University, Avadi, Chennai, India

² Department of Marine Engineering, National Kaohsiung University of Science and Technology, Kaohsiung, 811, Taiwan, R.O.C.

³ Department of Informatic, Universitas Malikussaleh, Aceh Utara, Indonesia

⁴ Department of Mechanical Engineering, Universitas Muhammadiyah Tasikmalaya, Indonesia

⁵ Faculty of Informatics and Computing, Universiti Sultan Zainal Abidin, Kuala Terengganu, Malaysia

⁶ Department of Marine Science, Faculty of Fishery and Marine Science, Universitas Padjadjaran, Indonesia

*sundarvtu@gmail.com

Abstract. A new 4-D multi-stable hyperchaotic two-scroll system with four quadratic nonlinearities is proposed in this paper. The dynamical properties of the new hyperchaotic system are described in terms of finding equilibrium points, phase portraits, Lyapunov exponents, Kaplan-Yorke dimension, dissipativity, etc. We discover that the new hyperchaotic system has no equilibrium point and hence it exhibits a hidden attractor. Furthermore, we show that the new hyperchaos system has multi-stability by the coexistence of hyperchaotic attractors for different values of initial conditions. As a control application, we use integral sliding mode control (ISMC) to derive new results for the hyperchaos synchronization of the new 4-D multi-stable hyperchaotic two-scroll system with hidden attractor.

1. Introduction

Chaos theory deals with nonlinear dynamical systems exhibiting high sensitivity to small changes in initial conditions [1-2]. Mathematically, chaotic systems are characterized by the presence of at least one positive Lyapunov exponent. Chaotic systems are very useful in many applications in science and engineering such as weather systems [3-5], ecology [6-10], neurons [11-12], biology [13-16], cellular neural networks [17-18], chemical reactors [19-24], brain waves [25-26], Tokamak systems [27-28], oscillators [29-35], encryption [36-44], finance systems [45-46], circuits [47-50], etc.

Hyperchaotic systems are defined as nonlinear dynamical systems having two or more positive Lyapunov exponents [1-2]. They exhibit more complex behaviour than chaotic dynamical systems as the trajectories of hyperchaotic systems can expand in two different directions corresponding to the two positive Lyapunov exponents. Many new hyperchaotic systems with special behaviour have been reported in the literature such as hyperchaotic Lorenz system [51], hyperchaotic Chen system [52], hyperchaotic Lü system [53], hyperchaotic Vaidyanathan systems [54-55], etc.

In this work, we report a new hyperchaotic two-scroll system with no equilibrium point. Thus, the new hyperchaos system belongs to the new class of hyperchaotic systems with *hidden attractors* [2].

We show that the new 4-D hyperchaotic system exhibits a two-scroll attractor. We analyze the dynamical properties of the new hyperchaotic two-scroll system with phase portraits, Lyapunov exponents, Kaplan-Yorke dimension, dissipativity, etc.

Section 2 describes the dynamics of the new hyperchaotic two-wing system, its phase plots and Lyapunov exponents. Section 3 describes the dynamic analysis of the new hyperchaotic two-wing system. We show that the new hyperchaos system exhibits multi-stability and this is confirmed b with the coexistence of two different hyperchaotic attractors for different initial conditions. Section 4 describes the hyperchaos synchronization of the new hyperchaos systems using sliding mode control. Section 5 draws the main conclusions of this research work.

2. A New Hyperchaotic Two-Scroll system with No Equilibrium Point

In this work, we report a new 4-D dynamical system given by

$$\begin{cases} \dot{x}_1 = a(x_2 - x_1) + x_2x_3 + x_4 \\ \dot{x}_2 = bx - cx - px^2 + x \\ \dot{x}_3 = x_1x_2 - d \\ \dot{x}_4 = -x_1 - x_2 \end{cases} \quad (1)$$

where $X = (x_1, x_2, x_3, x_4)$ is the state and a, b, c, d, p are positive constants.

In this paper, we show that the 4-D system (1) is *hyperchaotic* for the parameter values

$$a = 16, b = 3, c = 8, d = 20, p = 0.1 \quad (2)$$

Using Wolf's algorithm [56], the Lyapunov exponents of the system (1) for the parameter set $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and the initial state $X(0) = (0.2, 0.2, 0.2, 0.2)$ were found as

$$LE_1 = 3.0085, LE_2 = 0.0642, LE_3 = 0, LE_4 = -16.0506 \quad (3)$$

Thus, the 4-D system (1) is hyperchaotic with two positive Lyapunov exponents.

The high value of LE_1 over 3 indicates the highly complex chaotic nature of the new 4-D hyperchaotic system (1).

It is noted that the sum of the Lyapunov exponents in (3) is negative.

$$LE_1 + LE_2 + LE_3 + LE_4 \approx -13 < 0 \quad (4)$$

This shows that the system (1) is dissipative with a hyperchaotic attractor.

The Kaplan-Yorke dimension of the system (1) is computed as

$$D_{KY} = 3 + \frac{LE_1 + LE_2 + LE_3}{|LE_4|} = 3.1914 \quad (5)$$

Figure 1 shows the Lyapunov exponents of the 4-D dissipative hyperchaotic system (1) for the parameter set $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and initial state $X(0) = (0.2, 0.2, 0.2, 0.2)$.

Figures 2-5 show the 2-D phase portraits of the hyperchaotic system (1) for the parameter set $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and initial state $X(0) = (0.2, 0.2, 0.2, 0.2)$. From the phase plots, we see that the 4-D system (1) has a *hyperchaotic two-scroll attractor*.

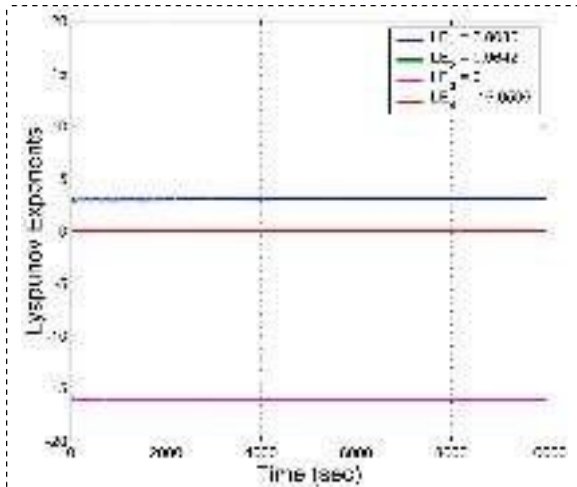


Figure 1. Lyapunov exponents of the hyperchaotic two-scroll system (1) for the parameter set $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and initial state $X(0) = (0.2, 0.2, 0.2, 0.2)$

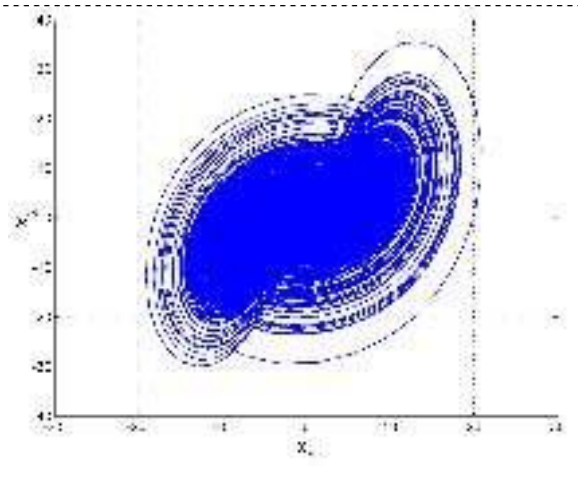


Figure 2. MATLAB plot showing the 2-D phase portrait of the hyperchaotic two-wing system (1) in the (x_1, x_2) -plane for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and $X(0) = (0.2, 0.2, 0.2, 0.2)$

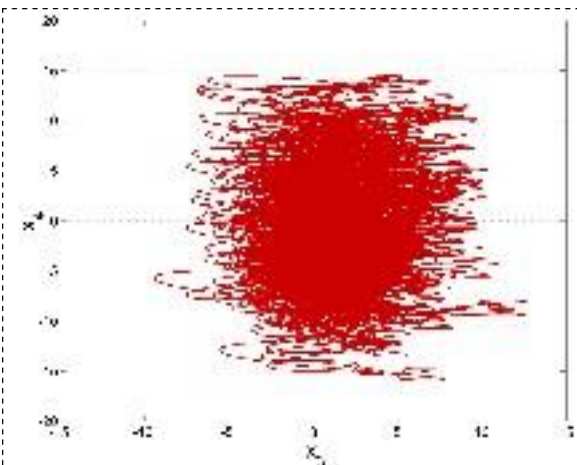


Figure 3. MATLAB plot showing the 2-D phase portrait of the hyperchaotic two-wing system (1) in the (x_2, x_3) -plane for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and $X(0) = (0.2, 0.2, 0.2, 0.2)$

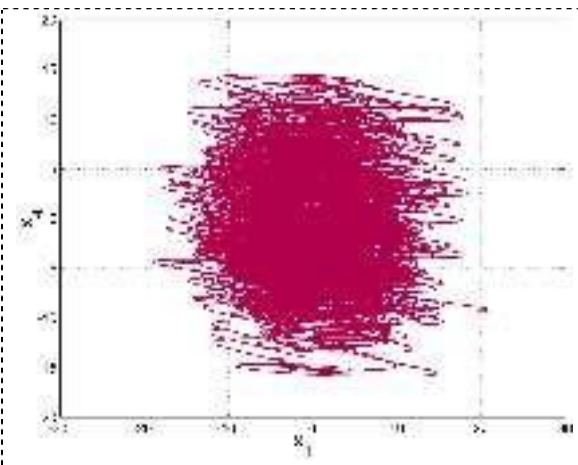


Figure 4. MATLAB plot showing the 2-D phase portrait of the hyperchaotic two-wing system (1) in the (x_3, x_4) -plane for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and $X(0) = (0.2, 0.2, 0.2, 0.2)$

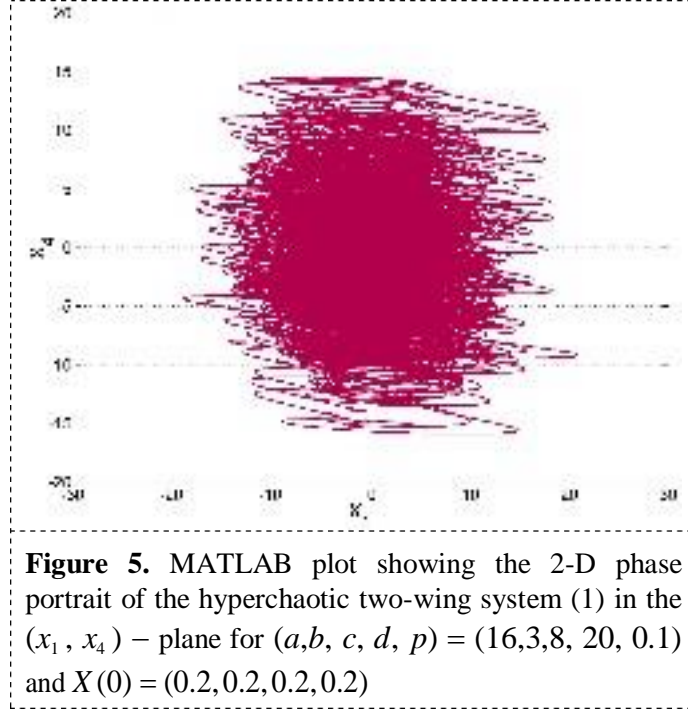


Figure 5. MATLAB plot showing the 2-D phase portrait of the hyperchaotic two-wing system (1) in the (x_1, x_4) - plane for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and $X(0) = (0.2, 0.2, 0.2, 0.2)$

The equilibrium points of the new hyperchaotic system (1) are obtained by solving the system

$$a(x_2 - x_1) + x_2 x_3 + x_4 = 0 \quad (6a)$$

$$bx_2^2 - cx_1 x_3 - px_1^2 + x_4 = 0 \quad (6b)$$

$$x_1 x_2 - d = 0 \quad (6c)$$

$$-x_1 - x_2 = 0 \quad (6d)$$

From (6d), we deduce that $x_1 = -x_2$.

Substituting above in (6c), we get $-x_2^2 - d = 0$ or

$$x_2^2 = -d \quad (7)$$

Since $d > 0$, the equation (7) does not admit any real solution.

Thus, the new 4-D hyperchaotic two-scroll system does not have any equilibrium point.

Hence, we conclude that the 4-D hyperchaotic system (1) has *hidden* attractor [2].

3. Dynamic Analysis for the New Hyperchaotic System

3.1 Dissipativity

The 4-D hyperchaotic two-scroll system introduced in this work is given by the dynamics

$$\begin{cases} \dot{x}_1 = a(x_2 - x_1) + x_2 x_3 + x_4 = f_1(x_1, x_2, x_3, x_4) \\ \dot{x}_2 = bx_2^2 - cx_1 x_3 - px_1^2 + x_4 = f_2(x_1, x_2, x_3, x_4) \\ \dot{x}_3 = x_1 x_2 - d = f_3(x_1, x_2, x_3, x_4) \\ \dot{x}_4 = -x_1^2 - x_2 = f_4(x_1, x_2, x_3, x_4) \end{cases} \quad (8)$$

The divergence of the flow defined by the system (8) is

$$\frac{\partial f_1}{\partial x_1} + \frac{\partial f_2}{\partial x_2} + \frac{\partial f_3}{\partial x_3} + \frac{\partial f_4}{\partial x_4} = -(a - b), \quad (9)$$

which is negative for the chosen parameter values (2).

This show that the 4-D hyperchaotic system (8) is dissipative.

Hence, the trajectories of the 4-D system (8) evolve to lie within a bounded region of the phase space.

3.2 Multi-stability

Multistability means the coexistence of two or more attractors under different initial conditions but with the same parameter set. It is an interesting phenomenon and can usually be found in many nonlinear systems [2]. Multistability can lead to very complex behaviors in a dynamical system [2].

It is interesting that our system (1) can exhibit coexisting attractors when choosing different initial conditions. For example, when selecting $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and the initial conditions $X_0 = (0.2, 0.2, 0.2, 0.2)$ (blue) and $Y_0 = (0.2, -0.2, 0.2, -0.2)$ (red), the 4-D hyperchaotic two-scroll system (1) displays coexisting hyperchaotic attractor (blue) and hyperchaotic attractor (red) as illustrated in Figures 6 and 7 respectively.

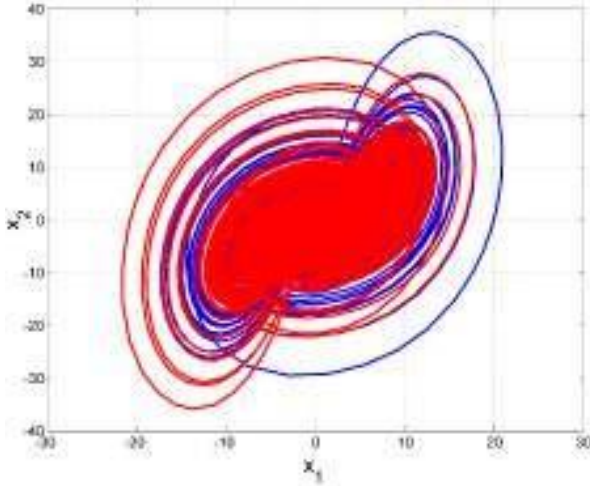


Figure 6. Multi-stability of the hyperchaotic system (1): Coexisting hyperchaotic attractors for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ in the (x_1, x_2) - plane. Blue color shows the hyperchaotic attractor of (1) with initial state $X_0 = (0.2, 0.2, 0.2, 0.2)$ and red color shows the hyperchaotic attractor of (1) with the initial state $Y_0 = (0.2, -0.2, 0.2, -0.2)$

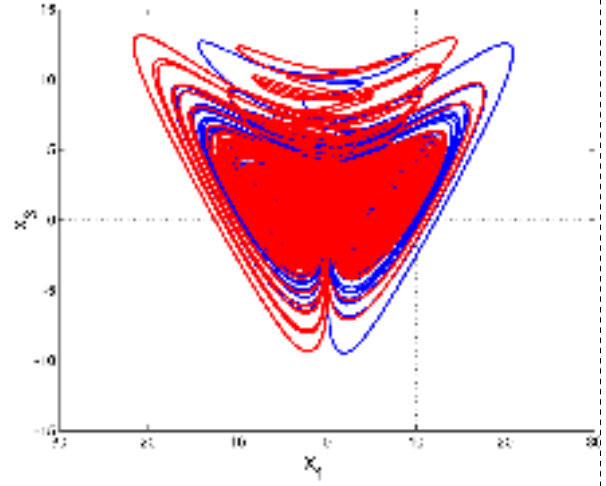


Figure 7. Multi-stability of the hyperchaotic system (1): Coexisting hyperchaotic attractors for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ in the (x_1, x_3) - plane. Blue color shows the hyperchaotic attractor of (1) with initial state $X_0 = (0.2, 0.2, 0.2, 0.2)$ and red color shows the hyperchaotic attractor of (1) with the initial state $Y_0 = (0.2, -0.2, 0.2, -0.2)$

4. Hyperchaos Synchronization of the New Hyperchaotic Two-Scroll System via Integral Sliding Mode Control

This section derives new results for the hyperchaos synchronization of a pair of new hyperchaotic systems taken as master and slave systems using integral sliding mode control [2].

As the master system, we consider the new hyperchaotic two-scroll system given by

$$\begin{cases} \dot{x}_1 = a(x_2 - x_1) + x_2 x_3 + x_4 \\ \dot{x}_2 = b x_1 - c x_1 x_3 - p x_2^2 + x_4 \\ \dot{x}_3 = x_1 x_2 - d \\ \dot{x}_4 = -x_1 - x_2 \end{cases} \quad (10)$$

where x_1, x_2, x_3, x_4 are the states and a, b, c, d, p are system parameters.

As the slave system, we consider the new hyperchaotic two-scroll system with controls given by

$$\begin{cases} \dot{y}_1 = a(y_2 - y_1) + y_2 y_3 + y_4 + u_1 \\ \dot{y}_2 = b y_2^2 - c y_1 y_3 - p y_1^2 + y_4 + u_2 \\ \dot{y}_3 = y_1 y_2 - d + u_3 \\ \dot{y}_4 = -y_1 - y_2 + u_4 \end{cases} \quad (11)$$

where y_1, y_2, y_3, y_4 are the states and u_1, u_2, u_3, u_4 are the sliding controls to be found.

The synchronization error between the new hyperchaotic systems (10) and (11) is defined as

$$\begin{cases} e_1 = y_1 - x_1 \\ e_2 = y_2 - x_2 \\ e_3 = y_3 - x_3 \\ e_4 = y_4 - x_4 \end{cases} \quad (12)$$

Then we obtain the error dynamics as follows:

$$\begin{cases} \dot{e}_1 = a(e_2 - e_1) + e_4 + y_2 y_3 - x_2 x_3 + u_1 \\ \dot{e}_2 = b e_2^2 + e_2^2 - c(y_1 y_3 - x_1 x_3) - p(y_1^2 - x_1^2) + u_2 \\ \dot{e}_3 = y_1 y_2 - x_1 x_2 + u_3 \\ \dot{e}_4 = -e_1 - e_2 + u_4 \end{cases} \quad (13)$$

Based on the sliding mode control theory, the integral sliding surface of each error variable is defined as follows:

$$\begin{cases} s_1 = \left[\frac{d}{dt} + \lambda_1 \right] \left[\int_0^t e_1(\tau) d\tau \right] = e_1 + \lambda_1 \int_0^t e_1(\tau) d\tau \\ s_2 = \left[\frac{d}{dt} + \lambda_2 \right] \left[\int_0^t e_2(\tau) d\tau \right] = e_2 + \lambda_2 \int_0^t e_2(\tau) d\tau \\ s_3 = \left[\frac{d}{dt} + \lambda_3 \right] \left[\int_0^t e_3(\tau) d\tau \right] = e_3 + \lambda_3 \int_0^t e_3(\tau) d\tau \\ s_4 = \left[\frac{d}{dt} + \lambda_4 \right] \left[\int_0^t e_4(\tau) d\tau \right] = e_4 + \lambda_4 \int_0^t e_4(\tau) d\tau \end{cases} \quad (14)$$

The derivative of each equation in (14) yields

$$\begin{cases} \dot{s}_1 = \dot{e}_1 + \lambda_1 e_1 \\ \dot{s}_2 = \dot{e}_2 + \lambda_2 e_2 \\ \dot{s}_3 = \dot{e}_3 + \lambda_3 e_3 \\ \dot{s}_4 = \dot{e}_4 + \lambda_4 e_4 \end{cases} \quad (15)$$

The Hurwitz condition is fulfilled if $\lambda_i, (i = 1, 2, 3, 4)$ are positive constants.

Based on the exponential reaching law of sliding mode control theory, we set

$$\begin{cases} \dot{s}_1 = -\eta_1 \operatorname{sgn}(s_1) - k_1 s_1 \\ \dot{s}_2 = -\eta_2 \operatorname{sgn}(s_2) - k_2 s_2 \\ \dot{s}_3 = -\eta_3 \operatorname{sgn}(s_3) - k_3 s_3 \\ \dot{s}_4 = -\eta_4 \operatorname{sgn}(s_4) - k_4 s_4 \end{cases} \quad (16)$$

Comparing equations (15) and (16), we get

$$\begin{cases} -\eta_1 \operatorname{sgn}(s_1) - k_1 s_1 = \dot{s}_1 + \lambda_1 e_1 \\ -\eta_2 \operatorname{sgn}(s_2) - k_2 s_2 = \dot{s}_2 + \lambda_2 e_2 \\ -\eta_3 \operatorname{sgn}(s_3) - k_3 s_3 = \dot{s}_3 + \lambda_3 e_3 \\ -\eta_4 \operatorname{sgn}(s_4) - k_4 s_4 = \dot{s}_4 + \lambda_4 e_4 \end{cases} \quad (17)$$

Using Eq. (13), we can rewrite Eq. (17) as follows:

$$\begin{cases} -\eta_1 \operatorname{sgn}(s_1) - k_1 s_1 = a(e_2 - e_1) + e_4 + y_2 y_3 - x_2 x_3 + u_1 + \lambda_1 e_1 \\ -\eta_2 \operatorname{sgn}(s_2) - k_2 s_2 = b e_2 + e_4 - c(y_1 y_2 - x_1 x_2) - p(y_1^2 - x_1^2) + u_2 + \lambda_2 e_2 \\ -\eta_3 \operatorname{sgn}(s_3) - k_3 s_3 = y_1 y_2 - x_1 x_2 + u_3 + \lambda_3 e_3 \\ -\eta_4 \operatorname{sgn}(s_4) - k_4 s_4 = -e_1 - e_2 + u_4 + \lambda_4 e_4 \end{cases} \quad (18)$$

From (18), we obtain the required sliding mode control (SMC) laws are as follows:

$$\begin{cases} u_1 = -a(e_2 - e_1) - e_4 - y_2 y_3 + x_2 x_3 - \lambda_1 e_1 - \eta_1 \operatorname{sgn}(s_1) - k_1 s_1 \\ u_2 = -b e_2 - e_4 + c(y_1 y_2 - x_1 x_2) + p(y_1^2 - x_1^2) - \lambda_2 e_2 - \eta_2 \operatorname{sgn}(s_2) - k_2 s_2 \\ u_3 = -y_1 y_2 + x_1 x_2 - \lambda_3 e_3 - \eta_3 \operatorname{sgn}(s_3) - k_3 s_3 \\ u_4 = e_1 + e_2 - \lambda_4 e_4 - \eta_4 \operatorname{sgn}(s_4) - k_4 s_4 \end{cases} \quad (19)$$

Theorem 1. The integral sliding mode control law (19) renders global hyperchaos synchronization for the new hyperchaotic two-scroll systems (10) and (11) for all initial conditions, where the constants $\lambda_1, \lambda_2, \lambda_3, \lambda_4, \eta_1, \eta_2, \eta_3, \eta_4, k_1, k_2, k_3, k_4$ are all positive.

Proof. This result is established with the help of Lyapunov stability theory [1-2].

We take the following quadratic Lyapunov function

$$V(s_1, s_2, s_3, s_4) = \frac{1}{2} (s_1^2 + s_2^2 + s_3^2 + s_4^2), \quad (20)$$

where s_1, s_2, s_3, s_4 are defined as in Eq. (14).

It is seen that the quadratic function V is positive definite and radially unbounded on R^4 .

The time-derivative of (20) is calculated as

$$\dot{V} = s_1 \dot{s}_1 + s_2 \dot{s}_2 + s_3 \dot{s}_3 + s_4 \dot{s}_4 = \sum_{i=1}^4 s_i \dot{s}_i \quad (21)$$

Substituting from Eq. (16) into Eq. (21), we get

$$\dot{V} = \sum_{i=1}^4 s_i [-\eta_i \operatorname{sgn}(s_i) - k_i s_i] = - \sum_{i=1}^4 [\eta_i |s_i| + k_i s_i^2] \quad (22)$$

Since $\eta_i > 0$ and $k_i > 0$ for $i = 1, 2, 3, 4$, we deduce from Eq. (22) that \dot{V} is a negative definite function on R^4 .

Thus, by Lyapunov stability theory, we conclude that $s_i(t) \rightarrow 0$ as $t \rightarrow \infty$ for $i = 1, 2, 3, 4$.

Hence, we conclude that $e_i(t) \rightarrow 0$ as $t \rightarrow \infty$ for $i = 1, 2, 3, 4$.

This completes the proof. ■

For numerical simulations, we take the initial conditions as in the hyperchaotic case (2), viz. $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$.

We consider the sliding constants as

$$\lambda_i = 0.2, \quad \eta_i = 0.2, \quad k_i = 22 \text{ for } i = 1, 2, 3, 4 \quad (23)$$

The initial state of the master system (10) is taken as

$$x_1(0) = 1.2, \quad x_2(0) = 3.5, \quad x_3(0) = 2.4, \quad x_4(0) = 0.8 \quad (24)$$

The initial state of the slave system (11) is taken as

$$y_1(0) = 3.9, \quad y_2(0) = 1.4, \quad y_3(0) = 0.3, \quad y_4(0) = 2.2 \quad (25)$$

Figures 8-11 show the complete synchronization of the new hyperchaotic systems (10) and (11).

Figure 12 shows the time-history of the synchronization errors e_1, e_2, e_3, e_4 .

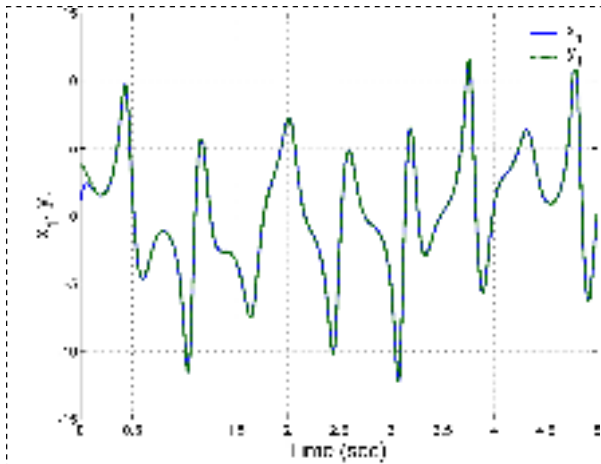


Figure 8. Synchronization between the states x_1 and y_1 of the hyperchaotic systems (10) and (11)

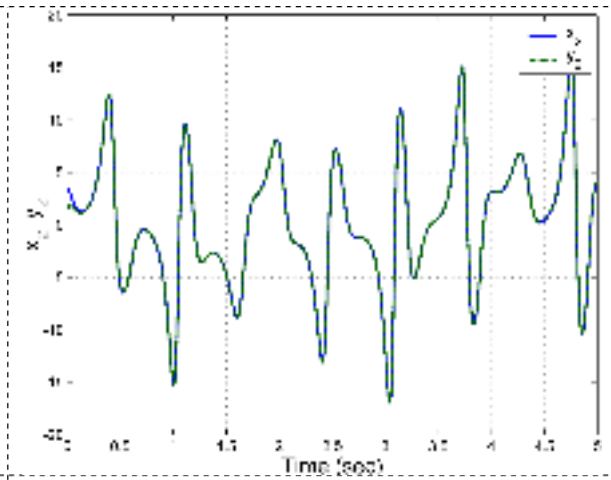


Figure 9. Synchronization between the states x_2 and y_2 of the hyperchaotic systems (10) and (11)

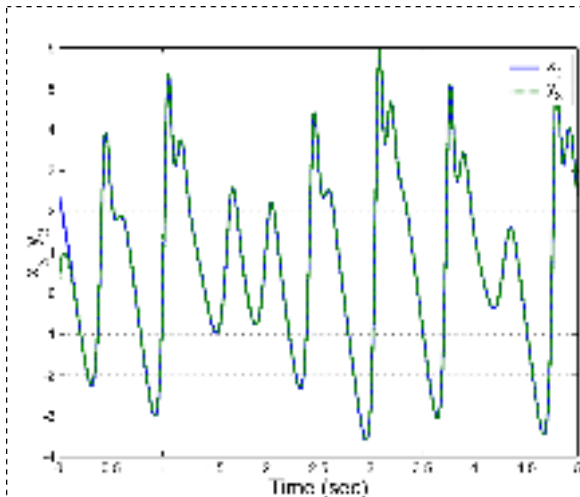


Figure 10. Synchronization between the states x_3 and y_3 of the hyperchaotic systems (10) and (11)

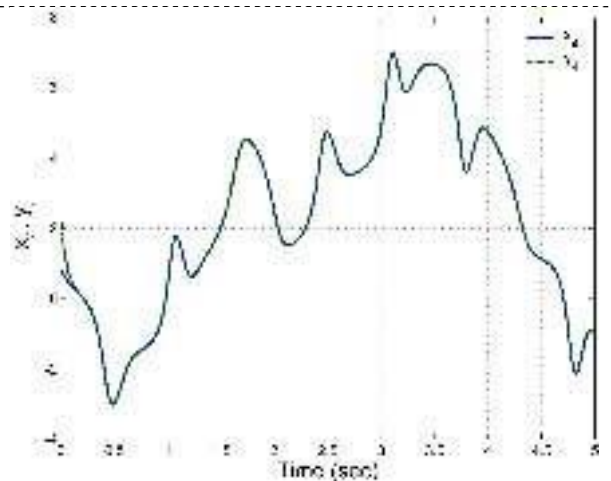


Figure 11. Synchronization between the states x_4 and y_4 of the hyperchaotic systems (10) and (11)

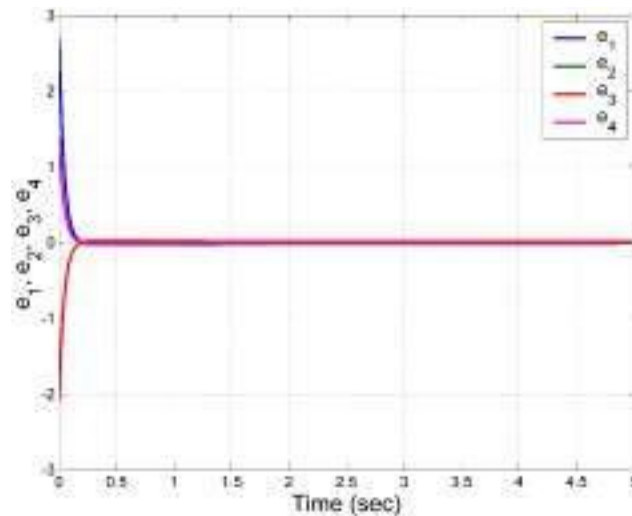


Figure 12. Time-history of the synchronization error between the hyperchaotic systems (10) and (11)

5. Conclusions

We reported a new 4-D multi-stable hyperchaotic two-scroll system with four quadratic nonlinearities in this paper. The dynamical properties of the new hyperchaotic system were analyzed terms of finding equilibrium points, phase portraits, Lyapunov exponents, Kaplan-Yorke dimension, dissipativity, etc. We showed that the new hyperchaotic system has no equilibrium point and hence it exhibits a hidden attractor. We also demonstrated that the new hyperchaos two-scroll system has multi-stability by the coexistence of hyperchaotic attractors for different values of initial conditions. As a control application, we applied integral sliding mode control to derive new results for the hyperchaos synchronization of the new 4-D multi-stable hyperchaotic two-scroll system.

References

- [1] Vaidyanathan S and Volos C 2017 *Advances and Applications in Chaotic Systems* (Berlin: Springer)
- [2] Pham V T, Vaidyanathan S, Volos C and Kapitaniak T 2018 *Nonlinear Dynamical Systems with Self-Excited and Hidden Attractors* (Berlin: Springer)
- [3] Vaidyanathan S, Azar A T, Rajagopal K, Sambas A, Kacar S and Cavusoglu U 2018 *International Journal of Simulation and Process Modelling* **13** 281-296
- [4] Vaidyanathan S, Volos C K, Rajagopal K, Kyprianidis I M and Stouboulos I N 2015 *Journal of Engineering Science and Technology Review* **8** 74-82
- [5] Rasappan S and Vaidyanathan S 2012 *Far East Journal of Mathematical Sciences* **67** 265-287
- [6] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 622-631
- [7] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 974-981
- [8] Vandermeer J and Perfecto I 2017 *Agroecology and Sustainable Food Systems* **41** 697-722
- [9] Pal N, Samanta S and Rana S 2017 *International Journal of Applied and Computational Mathematics* **3** 3615-3644
- [10] Chang L and Jin Z 2018 *Applied Mathematics and Computation* **316** 138-154
- [11] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 167-177
- [12] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 956-963
- [13] Tomita K 1982 *Journal of Theoretical Biology* **99** 111-118
- [14] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 106-116
- [15] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 156-166
- [16] Din Q, Shabbir M S, Khan M A and Ahmad K 2019 *Journal of Biological Dynamics* **13** 481-501

- [17] Njitacke Z T and Kengne J 2018 *AEU-International J. Electronics and Communications* **93** 242-252
- [18] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 946-955
- [19] Saad M, Safieddine A and Sultan R 2018 *Journal of Physical Chemistry A* **122** 6043-6047
- [20] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 159-171
- [21] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 740-749
- [22] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 146-158
- [23] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 669-683
- [24] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 209-221
- [25] Faust O, Acharya U R, Adeli H and Adeli A 2015 *Seizure* **26** 56-64
- [26] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 964-973
- [27] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 818-827
- [28] Maggs J E, Rhodes T L and Morales G J 2015 *Plasma Physics and Controlled Fusion* **57** 045004
- [29] Hellen E H and Volkov E 2018 *Communications in Nonlinear Science and Numerical Simulation* **62** 462-479
- [30] Vaidyanathan S 2013 *Lecture Notes in Electrical Engineering* **131** 319-327
- [31] Vaidyanathan S 2015 *International Journal of Modelling, Identification and Control* **23** 380-392
- [32] Vaidyanathan S and Rajagopal K 2011 *Communications in Computer and Information Science* **205** 193-202
- [33] Vaidyanathan S 2012 *Lecture Notes of the Institute for Computer Sciences, Social-Informatics and Telecommunications Engineering* **85** 124-133
- [34] Vaidyanathan S, Volos C and Pham V T 2015 *Studies in Computational Intelligence* **576** 571-590
- [35] Pham V T, Vaidyanathan S, Volos C K, Jafari S, Kuznetsov N V and Hoang T M 2016 *European Physical Journal: Special Topics* **225** 127-136
- [36] Xu Q, Zhang Q, Jiang T, Bao B and Chen M 2018 *Circuit World* **44** 108-114
- [37] Vaidyanathan S, Sambas A, Mamat M and Sanjaya W S M 2017 *Archives of Control Sciences* **27** 541-554
- [38] Singh J P, Lochan K, Kuznetsov N V and Roy B K 2017 *Nonlinear Dynamics* **90** 1277-1299
- [39] Wang Y, Mou Y and Zhang J 2018 *Journal of Harbin Engineering University* **39** 584-593
- [40] Mansour S M B, Sundarapandian V and Naceur S M 2016 *International Journal of Control Theory and Applications* **9** 37-54
- [41] Vaidyanathan S and Rajagopal K 2017 *International Journal of Simulation and Process Modelling* **12** 165-178
- [42] Dou Y, Liu X, Fan H and Li M 2017 *Optik* **145** 456-464
- [43] Vaidyanathan S, Sambas A, Mamat M and Sanjaya W S M 2017 *International Journal of Modelling, Identification and Control* **28** 153-166
- [44] Idowu B A, Vaidyanathan S, Sambas A, Olusola O I and Onma O S 2018 *Studies in Systems, Decision and Control* **133** 271-295
- [45] Tacha O I, Volos C K, Kyprianidis I M, Stouboulos I N, Vaidyanathan S and Pham V T 2016 *Applied Mathematics and Computation* **276** 200-217
- [46] Volos C K, Pham V T, Vaidyanathan S, Kyprianidis I M and Stouboulos I N 2015 *Journal of Engineering Science and Technology Review* **8** 142-151
- [47] Daltzis P, Vaidyanathan S, Pham V T, Volos C, Nistazakis E. and Tombras G. 2018 *Circuits, Systems, and Signal Processing* **37** 613-615
- [48] Sambas A, Vaidyanathan S, Mamat M and Mada Sanjaya W S 2018 *Studies in Systems, Decision and Control* **133** 365-373
- [49] Pham V T, Jafari S, Volos C, Giakoumis A, Vaidyanathan S and Kapitaniak T 2016 *IEEE Transactions on Circuits and Systems II: Express Briefs* **63** 878-882

- [50] Sambas A, Vaidyanathan S, Zhang S, Zeng Y, Mohamed M A and Mamat M 2019 *IEEE Access* **7** 115454-115462
- [51] Arabyani H and Nik H S 2016 *International Journal of Modelling, Identification and Control* **25** 138-144
- [52] Ouannas A, Grassi G, Ziar T and Odibat Z 2017 *Optik* **136** 513-523
- [53] Mahmoud G M, Mahmoud E E and Arafa A A 2015 *Nonlinear Dynamics* **80** 855-869
- [54] Vaidyanathan S, Dolvis L G, Jacques K, Lien C H and Sambas A 2019 *International Journal of Modelling, Identification and Control* **32** 30-45
- [55] Vaidyanathan S, Azar A T and Boulkroune A 2018 *International Journal of Automation and Control* **12** 5-26
- [56] Wolf A, Swift J B, Swinney H L and Vastano J A 1985 *Physica D* **16** 285-317

Print this page



ICComSET 2019

The 2nd International Conference on Computer, Science,
Engineering and Technology

Universitas Muhammadiyah Tasikmalaya/Banten, 15-16 October 2019

Website: <http://www.2ndiccomset.umtas.ac.id>

Email: iccomset@umtas.ac.id

Date: 11 October 2019

Payment Invoice

Submission Title A New 4-D Multi-Stable Hyperchaotic Two-Scroll System with No-Equilibrium and its Hyperchaos Synchronization

Authors S. Vaidyanathan^{1,*}, C-H Lien², W. Fuadi³, Mujiarto⁴, M. Mamat⁵ and Subiyanto⁶

Registration Type Indonesian Presenter

Payment Amount IDR 2,850,000 (**Not Paid**)

Payment Account	
Bank Name	Bank Syariah Mandiri
Account Number	7142050476
Account Holder	LPPM UMTAS
Info	BSMDIDJAXXX

Note that this document is NOT receipt of payment, please make the payment and then upload your payment proof to the online system.

Best regards,

Anggia Suci Pratiwi, M.Pd.
ICComSET 2019 Finance Manager

[Print this page](#)

ICComSET 2019

The 2nd International Conference on Computer, Science,
Engineering and Technology

Universitas Muhammadiyah Tasikmalaya/Banten, 15-16 October 2019

Website: <http://www.2ndiccomset.umtas.ac.id>

Email: iccomset@umtas.ac.id

Date: 11 October 2019

Payment Receipt

The organizing committee of ICComSET 2019 acknowledges the following payment for registration fee,

Abstract ID ABS-221 (Oral Presentation)

Title "A New 4-D Multi-Stable Hyperchaotic Two-Scroll System with No-Equilibrium and its Hyperchaos Synchronization"

Authors S. Vaidyanathan^{1,*}, C-H Lien², W. Fuadi³, Mujiarto⁴, M. Mamat⁵ and Subiyanto⁶

Paid Amount IDR 2,850,000

Paid By Mr. A. Sambas

Thank You.

Best regards,

A handwritten signature in black ink, appearing to read 'Anggia Suci Pratiwi'.

Anggia Suci Pratiwi, M.Pd.
ICComSET 2019 Finance Manager

New 4-D Multi-Stable Hyperchaotic Two-Scroll System with No-Equilibrium and its Hyperchaos Synchronization

S. Vaidyanathan^{1,*}, C-H Lien², W. Fuadi³, Mujiarto⁴, M. Mamat⁵ and Subiyanto⁶

¹ Research and Development Centre, Vel Tech University, Avadi, Chennai, India

² Department of Marine Engineering, National Kaohsiung University of Science and Technology, Kaohsiung, 811, Taiwan, R.O.C.

³ Department of Informatic, Universitas Malikussaleh, Aceh Utara, Indonesia

⁴ Department of Mechanical Engineering, Universitas Muhammadiyah Tasikmalaya, Indonesia

⁵ Faculty of Informatics and Computing, Universiti Sultan Zainal Abidin, Kuala Terengganu, Malaysia

⁶ Department of Marine Science, Faculty of Fishery and Marine Science, Universitas Padjadjaran, Indonesia

*sundarvtu@gmail.com

Abstract. A new 4-D multi-stable hyperchaotic two-scroll system with four quadratic nonlinearities is proposed in this paper. The dynamical properties of the new hyperchaotic system are described in terms of finding equilibrium points, phase portraits, Lyapunov exponents, Kaplan-Yorke dimension, dissipativity, etc. We discover that the new hyperchaotic system has no equilibrium point and hence it exhibits a hidden attractor. Furthermore, we show that the new hyperchaos system has multi-stability by the coexistence of hyperchaotic attractors for different values of initial conditions. As a control application, we use integral sliding mode control (ISM) to derive new results for the hyperchaos synchronization of the new 4-D multi-stable hyperchaotic two-scroll system with hidden attractor.

1. Introduction

Chaos theory deals with nonlinear dynamical systems exhibiting high sensitivity to small changes in initial conditions [1-2]. Mathematically, chaotic systems are characterized by the presence of at least one positive Lyapunov exponent. Chaotic systems are very useful in many applications in science and engineering such as weather systems [3-5], ecology [6-10], neurons [11-12], biology [13-16], cellular neural networks [17-18], chemical reactors [19-24], brain waves [25-26], Tokamak systems [27-28], oscillators [29-35], encryption [36-44], finance systems [45-46], circuits [47-50], etc.

Hyperchaotic systems are defined as nonlinear dynamical systems having two or more positive Lyapunov exponents [1-2]. They exhibit more complex behaviour than chaotic dynamical systems as the trajectories of hyperchaotic systems can expand in two different directions corresponding to the two positive Lyapunov exponents. Many new hyperchaotic systems with special behaviour have been reported in the literature such as hyperchaotic Lorenz system [51], hyperchaotic Chen system [52], hyperchaotic Lü system [53], hyperchaotic Vaidyanathan systems [54-55], etc.

In this work, we report a new hyperchaotic two-scroll system with no equilibrium point. Thus, the new hyperchaos system belongs to the new class of hyperchaotic systems with *hidden attractors* [2].

We show that the new 4-D hyperchaotic system exhibits a two-scroll attractor. We analyze the dynamical properties of the new hyperchaotic two-scroll system with phase portraits, Lyapunov exponents, Kaplan-Yorke dimension, dissipativity, etc.

Section 2 describes the dynamics of the new hyperchaotic two-wing system, its phase plots and Lyapunov exponents. Section 3 describes the dynamic analysis of the new hyperchaotic two-wing system. We show that the new hyperchaos system exhibits multi-stability and this is confirmed b with the coexistence of two different hyperchaotic attractors for different initial conditions. Section 4 describes the hyperchaos synchronization of the new hyperchaos systems using sliding mode control. Section 5 draws the main conclusions of this research work.

2. A New Hyperchaotic Two-Scroll system with No Equilibrium Point

In this work, we report a new 4-D dynamical system given by

$$\begin{cases} \dot{x}_1 = a(x_2 - x_1) + x_2x_3 + x_4 \\ \dot{x}_2 = bx - cx - px^2 + x \\ \dot{x}_3 = x_1x_2 - d \\ \dot{x}_4 = -x_1 - x_2 \end{cases} \quad (1)$$

where $X = (x_1, x_2, x_3, x_4)$ is the state and a, b, c, d, p are positive constants.

In this paper, we show that the 4-D system (1) is *hyperchaotic* for the parameter values

$$a = 16, b = 3, c = 8, d = 20, p = 0.1 \quad (2)$$

Using Wolf's algorithm [56], the Lyapunov exponents of the system (1) for the parameter set $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and the initial state $X(0) = (0.2, 0.2, 0.2, 0.2)$ were found as

$$LE_1 = 3.0085, LE_2 = 0.0642, LE_3 = 0, LE_4 = -16.0506 \quad (3)$$

Thus, the 4-D system (1) is hyperchaotic with two positive Lyapunov exponents.

The high value of LE_1 over 3 indicates the highly complex chaotic nature of the new 4-D hyperchaotic system (1).

It is noted that the sum of the Lyapunov exponents in (3) is negative.

$$LE_1 + LE_2 + LE_3 + LE_4 \approx -13 < 0 \quad (4)$$

This shows that the system (1) is dissipative with a hyperchaotic attractor.

The Kaplan-Yorke dimension of the system (1) is computed as

$$D_{KY} = 3 + \frac{LE_1 + LE_2 + LE_3}{|LE_4|} = 3.1914 \quad (5)$$

Figure 1 shows the Lyapunov exponents of the 4-D dissipative hyperchaotic system (1) for the parameter set $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and initial state $X(0) = (0.2, 0.2, 0.2, 0.2)$.

Figures 2-5 show the 2-D phase portraits of the hyperchaotic system (1) for the parameter set $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and initial state $X(0) = (0.2, 0.2, 0.2, 0.2)$. From the phase plots, we see that the 4-D system (1) has a *hyperchaotic two-scroll attractor*.

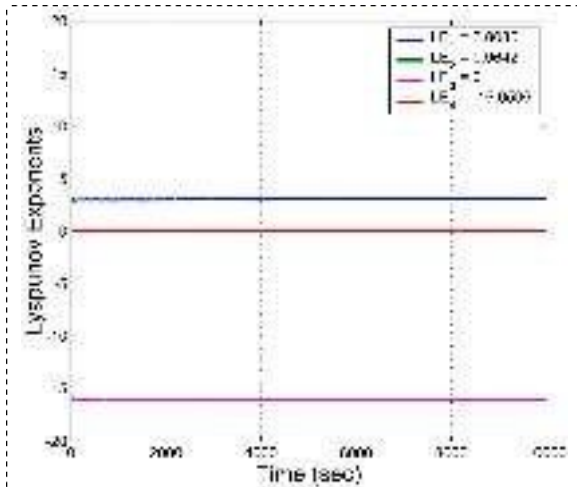


Figure 1. Lyapunov exponents of the hyperchaotic two-scroll system (1) for the parameter set $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and initial state $X(0) = (0.2, 0.2, 0.2, 0.2)$

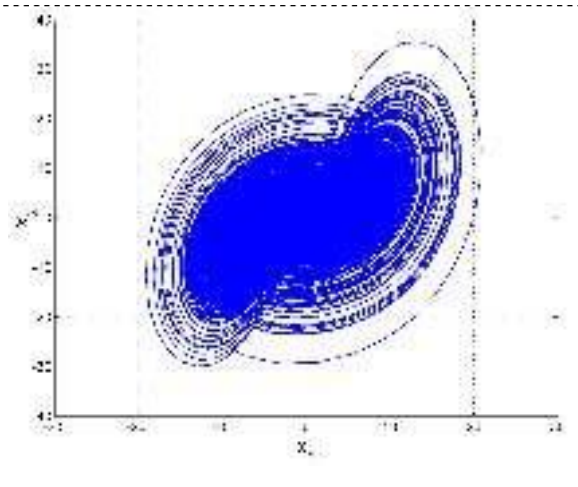


Figure 2. MATLAB plot showing the 2-D phase portrait of the hyperchaotic two-wing system (1) in the (x_1, x_2) -plane for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and $X(0) = (0.2, 0.2, 0.2, 0.2)$

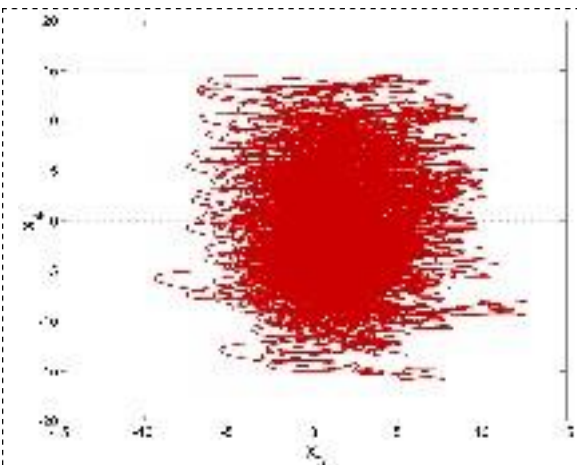


Figure 3. MATLAB plot showing the 2-D phase portrait of the hyperchaotic two-wing system (1) in the (x_2, x_3) -plane for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and $X(0) = (0.2, 0.2, 0.2, 0.2)$

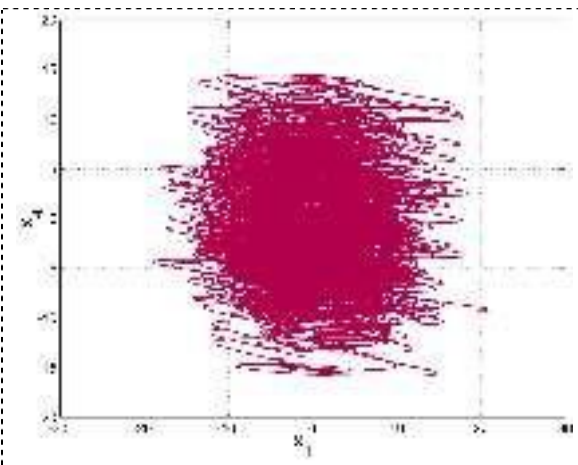


Figure 4. MATLAB plot showing the 2-D phase portrait of the hyperchaotic two-wing system (1) in the (x_3, x_4) -plane for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and $X(0) = (0.2, 0.2, 0.2, 0.2)$

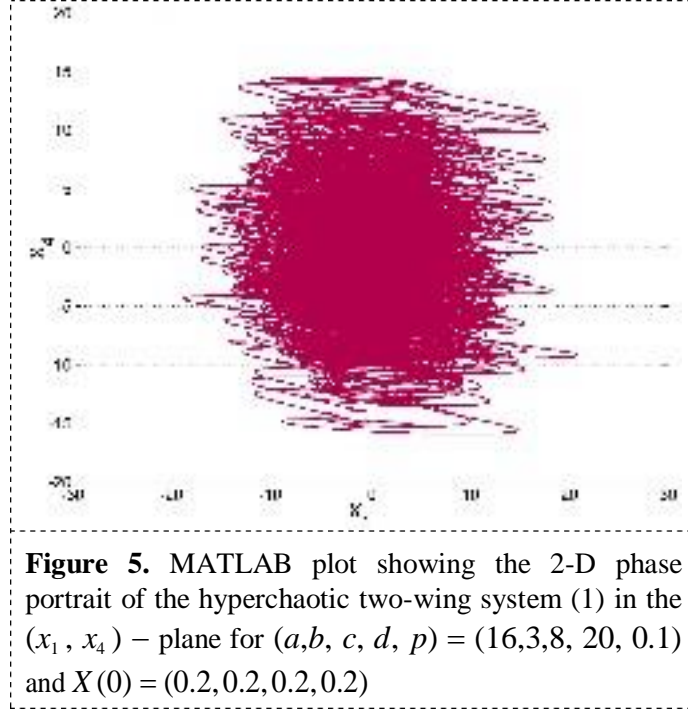


Figure 5. MATLAB plot showing the 2-D phase portrait of the hyperchaotic two-wing system (1) in the (x_1, x_4) - plane for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and $X(0) = (0.2, 0.2, 0.2, 0.2)$

The equilibrium points of the new hyperchaotic system (1) are obtained by solving the system

$$a(x_2 - x_1) + x_2 x_3 + x_4 = 0 \quad (6a)$$

$$bx_2^2 - cx_1 x_3 - px_1^2 + x_4 = 0 \quad (6b)$$

$$x_1 x_2 - d = 0 \quad (6c)$$

$$-x_1 - x_2 = 0 \quad (6d)$$

From (6d), we deduce that $x_1 = -x_2$.

Substituting above in (6c), we get $-x_2^2 - d = 0$ or

$$x_2^2 = -d \quad (7)$$

Since $d > 0$, the equation (7) does not admit any real solution.

Thus, the new 4-D hyperchaotic two-scroll system does not have any equilibrium point.

Hence, we conclude that the 4-D hyperchaotic system (1) has *hidden* attractor [2].

3. Dynamic Analysis for the New Hyperchaotic System

3.1 Dissipativity

The 4-D hyperchaotic two-scroll system introduced in this work is given by the dynamics

$$\begin{cases} \dot{x}_1 = a(x_2 - x_1) + x_2 x_3 + x_4 = f_1(x_1, x_2, x_3, x_4) \\ \dot{x}_2 = bx_2^2 - cx_1 x_3 - px_1^2 + x_4 = f_2(x_1, x_2, x_3, x_4) \\ \dot{x}_3 = x_1 x_2 - d = f_3(x_1, x_2, x_3, x_4) \\ \dot{x}_4 = -x_1^2 - x_2 = f_4(x_1, x_2, x_3, x_4) \end{cases} \quad (8)$$

The divergence of the flow defined by the system (8) is

$$\frac{\partial f_1}{\partial x_1} + \frac{\partial f_2}{\partial x_2} + \frac{\partial f_3}{\partial x_3} + \frac{\partial f_4}{\partial x_4} = -(a - b), \quad (9)$$

which is negative for the chosen parameter values (2).

This show that the 4-D hyperchaotic system (8) is dissipative.

Hence, the trajectories of the 4-D system (8) evolve to lie within a bounded region of the phase space.

3.2 Multi-stability

Multistability means the coexistence of two or more attractors under different initial conditions but with the same parameter set. It is an interesting phenomenon and can usually be found in many nonlinear systems [2]. Multistability can lead to very complex behaviors in a dynamical system [2].

It is interesting that our system (1) can exhibit coexisting attractors when choosing different initial conditions. For example, when selecting $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and the initial conditions $X_0 = (0.2, 0.2, 0.2, 0.2)$ (blue) and $Y_0 = (0.2, -0.2, 0.2, -0.2)$ (red), the 4-D hyperchaotic two-scroll system (1) displays coexisting hyperchaotic attractor (blue) and hyperchaotic attractor (red) as illustrated in Figures 6 and 7 respectively.

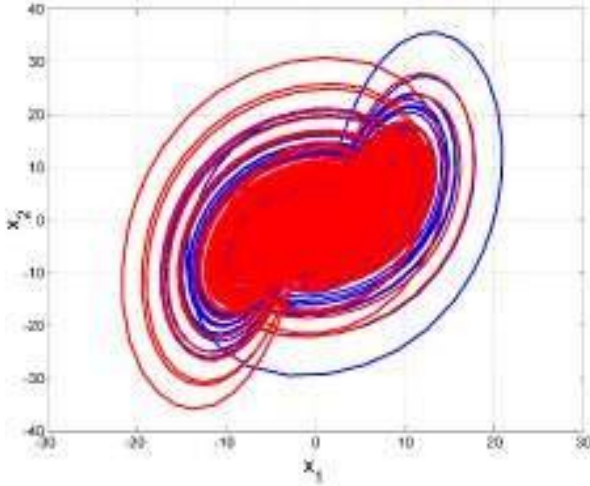


Figure 6. Multi-stability of the hyperchaotic system (1): Coexisting hyperchaotic attractors for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ in the (x_1, x_2) - plane. Blue color shows the hyperchaotic attractor of (1) with initial state $X_0 = (0.2, 0.2, 0.2, 0.2)$ and red color shows the hyperchaotic attractor of (1) with the initial state $Y_0 = (0.2, -0.2, 0.2, -0.2)$

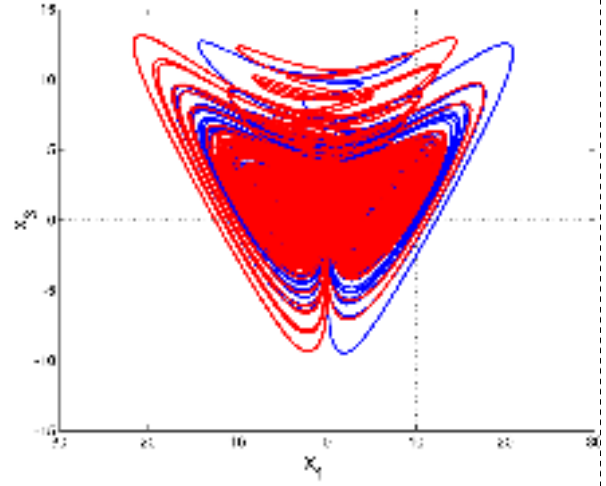


Figure 7. Multi-stability of the hyperchaotic system (1): Coexisting hyperchaotic attractors for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ in the (x_1, x_3) - plane. Blue color shows the hyperchaotic attractor of (1) with initial state $X_0 = (0.2, 0.2, 0.2, 0.2)$ and red color shows the hyperchaotic attractor of (1) with the initial state $Y_0 = (0.2, -0.2, 0.2, -0.2)$

4. Hyperchaos Synchronization of the New Hyperchaotic Two-Scroll System via Integral Sliding Mode Control

This section derives new results for the hyperchaos synchronization of a pair of new hyperchaotic systems taken as master and slave systems using integral sliding mode control [2].

As the master system, we consider the new hyperchaotic two-scroll system given by

$$\begin{cases} \dot{x}_1 = a(x_2 - x_1) + x_2 x_3 + x_4 \\ \dot{x}_2 = b x_1 - c x_1 x_3 - p x_2^2 + x_4 \\ \dot{x}_3 = x_1 x_2 - d \\ \dot{x}_4 = -x_1 - x_2 \end{cases} \quad (10)$$

where x_1, x_2, x_3, x_4 are the states and a, b, c, d, p are system parameters.

As the slave system, we consider the new hyperchaotic two-scroll system with controls given by

$$\begin{cases} \dot{y}_1 = a(y_2 - y_1) + y_2 y_3 + y_4 + u_1 \\ \dot{y}_2 = b y_2^2 - c y_1 y_3 - p y_1^2 + y_4 + u_2 \\ \dot{y}_3 = y_1 y_2 - d + u_3 \\ \dot{y}_4 = -y_1 - y_2 + u_4 \end{cases} \quad (11)$$

where y_1, y_2, y_3, y_4 are the states and u_1, u_2, u_3, u_4 are the sliding controls to be found.

The synchronization error between the new hyperchaotic systems (10) and (11) is defined as

$$\begin{cases} e_1 = y_1 - x_1 \\ e_2 = y_2 - x_2 \\ e_3 = y_3 - x_3 \\ e_4 = y_4 - x_4 \end{cases} \quad (12)$$

Then we obtain the error dynamics as follows:

$$\begin{cases} \dot{e}_1 = a(e_2 - e_1) + e_4 + y_2 y_3 - x_2 x_3 + u_1 \\ \dot{e}_2 = b e_2^2 + e_2^2 - c(y_1 y_3 - x_1 x_3) - p(y_1^2 - x_1^2) + u_2 \\ \dot{e}_3 = y_1 y_2 - x_1 x_2 + u_3 \\ \dot{e}_4 = -e_1 - e_2 + u_4 \end{cases} \quad (13)$$

Based on the sliding mode control theory, the integral sliding surface of each error variable is defined as follows:

$$\begin{cases} s_1 = \left[\frac{d}{dt} + \lambda_1 \right] \left[\int_0^t e_1(\tau) d\tau \right] = e_1 + \lambda_1 \int_0^t e_1(\tau) d\tau \\ s_2 = \left[\frac{d}{dt} + \lambda_2 \right] \left[\int_0^t e_2(\tau) d\tau \right] = e_2 + \lambda_2 \int_0^t e_2(\tau) d\tau \\ s_3 = \left[\frac{d}{dt} + \lambda_3 \right] \left[\int_0^t e_3(\tau) d\tau \right] = e_3 + \lambda_3 \int_0^t e_3(\tau) d\tau \\ s_4 = \left[\frac{d}{dt} + \lambda_4 \right] \left[\int_0^t e_4(\tau) d\tau \right] = e_4 + \lambda_4 \int_0^t e_4(\tau) d\tau \end{cases} \quad (14)$$

The derivative of each equation in (14) yields

$$\begin{cases} \dot{s}_1 = \dot{e}_1 + \lambda_1 e_1 \\ \dot{s}_2 = \dot{e}_2 + \lambda_2 e_2 \\ \dot{s}_3 = \dot{e}_3 + \lambda_3 e_3 \\ \dot{s}_4 = \dot{e}_4 + \lambda_4 e_4 \end{cases} \quad (15)$$

The Hurwitz condition is fulfilled if $\lambda_i, (i = 1, 2, 3, 4)$ are positive constants.

Based on the exponential reaching law of sliding mode control theory, we set

$$\begin{cases} \dot{s}_1 = -\eta_1 \operatorname{sgn}(s_1) - k_1 s_1 \\ \dot{s}_2 = -\eta_2 \operatorname{sgn}(s_2) - k_2 s_2 \\ \dot{s}_3 = -\eta_3 \operatorname{sgn}(s_3) - k_3 s_3 \\ \dot{s}_4 = -\eta_4 \operatorname{sgn}(s_4) - k_4 s_4 \end{cases} \quad (16)$$

Comparing equations (15) and (16), we get

$$\begin{cases} -\eta_1 \operatorname{sgn}(s_1) - k_1 s_1 = \dot{s}_1 + \lambda_1 e_1 \\ -\eta_2 \operatorname{sgn}(s_2) - k_2 s_2 = \dot{s}_2 + \lambda_2 e_2 \\ -\eta_3 \operatorname{sgn}(s_3) - k_3 s_3 = \dot{s}_3 + \lambda_3 e_3 \\ -\eta_4 \operatorname{sgn}(s_4) - k_4 s_4 = \dot{s}_4 + \lambda_4 e_4 \end{cases} \quad (17)$$

Using Eq. (13), we can rewrite Eq. (17) as follows:

$$\begin{cases} -\eta_1 \operatorname{sgn}(s_1) - k_1 s_1 = a(e_2 - e_1) + e_4 + y_2 y_3 - x_2 x_3 + u_1 + \lambda_1 e_1 \\ -\eta_2 \operatorname{sgn}(s_2) - k_2 s_2 = b e_2 + e_4 - c(y_1 y_2 - x_1 x_2) - p(y_1^2 - x_1^2) + u_2 + \lambda_2 e_2 \\ -\eta_3 \operatorname{sgn}(s_3) - k_3 s_3 = y_1 y_2 - x_1 x_2 + u_3 + \lambda_3 e_3 \\ -\eta_4 \operatorname{sgn}(s_4) - k_4 s_4 = -e_1 - e_2 + u_4 + \lambda_4 e_4 \end{cases} \quad (18)$$

From (18), we obtain the required sliding mode control (SMC) laws are as follows:

$$\begin{cases} u_1 = -a(e_2 - e_1) - e_4 - y_2 y_3 + x_2 x_3 - \lambda_1 e_1 - \eta_1 \operatorname{sgn}(s_1) - k_1 s_1 \\ u_2 = -b e_2 - e_4 + c(y_1 y_2 - x_1 x_2) + p(y_1^2 - x_1^2) - \lambda_2 e_2 - \eta_2 \operatorname{sgn}(s_2) - k_2 s_2 \\ u_3 = -y_1 y_2 + x_1 x_2 - \lambda_3 e_3 - \eta_3 \operatorname{sgn}(s_3) - k_3 s_3 \\ u_4 = e_1 + e_2 - \lambda_4 e_4 - \eta_4 \operatorname{sgn}(s_4) - k_4 s_4 \end{cases} \quad (19)$$

Theorem 1. The integral sliding mode control law (19) renders global hyperchaos synchronization for the new hyperchaotic two-scroll systems (10) and (11) for all initial conditions, where the constants $\lambda_1, \lambda_2, \lambda_3, \lambda_4, \eta_1, \eta_2, \eta_3, \eta_4, k_1, k_2, k_3, k_4$ are all positive.

Proof. This result is established with the help of Lyapunov stability theory [1-2].

We take the following quadratic Lyapunov function

$$V(s_1, s_2, s_3, s_4) = \frac{1}{2} (s_1^2 + s_2^2 + s_3^2 + s_4^2), \quad (20)$$

where s_1, s_2, s_3, s_4 are defined as in Eq. (14).

It is seen that the quadratic function V is positive definite and radially unbounded on R^4 .

The time-derivative of (20) is calculated as

$$\dot{V} = s_1 \dot{s}_1 + s_2 \dot{s}_2 + s_3 \dot{s}_3 + s_4 \dot{s}_4 = \sum_{i=1}^4 s_i \dot{s}_i \quad (21)$$

Substituting from Eq. (16) into Eq. (21), we get

$$\dot{V} = \sum_{i=1}^4 s_i [-\eta_i \operatorname{sgn}(s_i) - k_i s_i] = - \sum_{i=1}^4 [\eta_i |s_i| + k_i s_i^2] \quad (22)$$

Since $\eta_i > 0$ and $k_i > 0$ for $i = 1, 2, 3, 4$, we deduce from Eq. (22) that \dot{V} is a negative definite function on R^4 .

Thus, by Lyapunov stability theory, we conclude that $s_i(t) \rightarrow 0$ as $t \rightarrow \infty$ for $i = 1, 2, 3, 4$.

Hence, we conclude that $e_i(t) \rightarrow 0$ as $t \rightarrow \infty$ for $i = 1, 2, 3, 4$.

This completes the proof. ■

For numerical simulations, we take the initial conditions as in the hyperchaotic case (2), viz. $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$.

We consider the sliding constants as

$$\lambda_i = 0.2, \quad \eta_i = 0.2, \quad k_i = 22 \text{ for } i = 1, 2, 3, 4 \quad (23)$$

The initial state of the master system (10) is taken as

$$x_1(0) = 1.2, \quad x_2(0) = 3.5, \quad x_3(0) = 2.4, \quad x_4(0) = 0.8 \quad (24)$$

The initial state of the slave system (11) is taken as

$$y_1(0) = 3.9, \quad y_2(0) = 1.4, \quad y_3(0) = 0.3, \quad y_4(0) = 2.2 \quad (25)$$

Figures 8-11 show the complete synchronization of the new hyperchaotic systems (10) and (11).

Figure 12 shows the time-history of the synchronization errors e_1, e_2, e_3, e_4 .

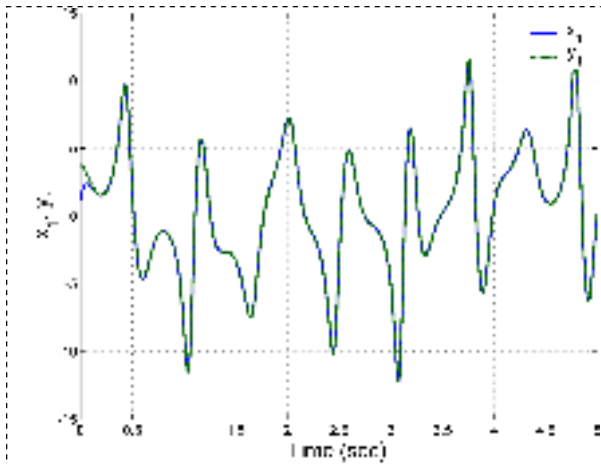


Figure 8. Synchronization between the states x_1 and y_1 of the hyperchaotic systems (10) and (11)

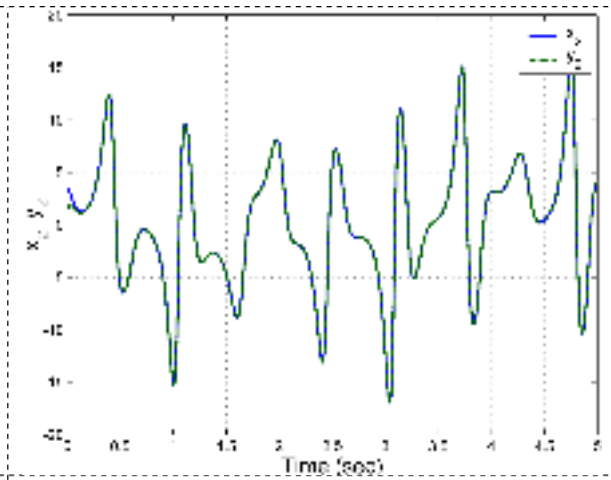


Figure 9. Synchronization between the states x_2 and y_2 of the hyperchaotic systems (10) and (11)

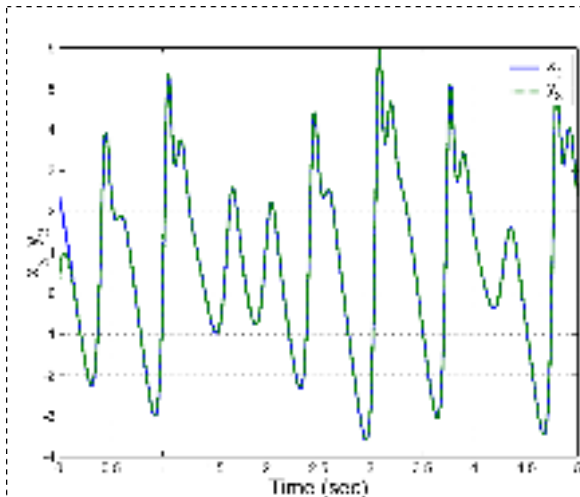


Figure 10. Synchronization between the states x_3 and y_3 of the hyperchaotic systems (10) and (11)

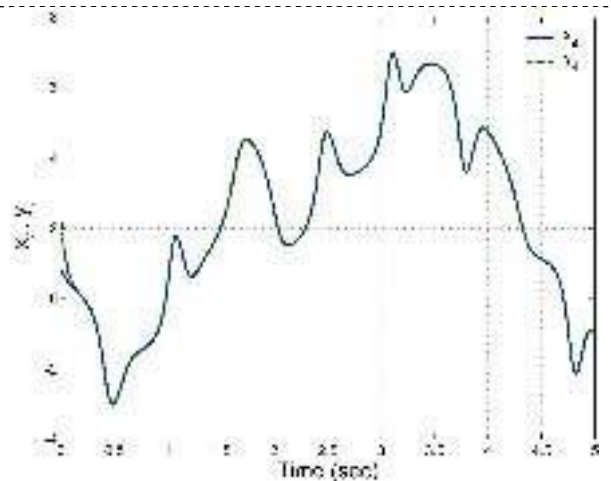


Figure 11. Synchronization between the states x_4 and y_4 of the hyperchaotic systems (10) and (11)

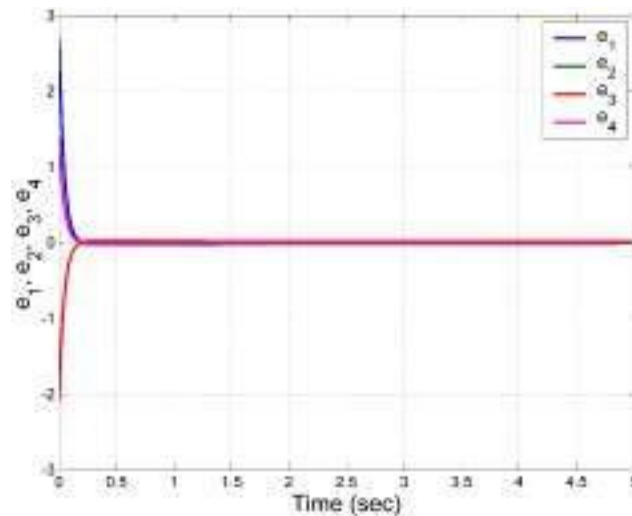


Figure 12. Time-history of the synchronization error between the hyperchaotic systems (10) and (11)

5. Conclusions

We reported a new 4-D multi-stable hyperchaotic two-scroll system with four quadratic nonlinearities in this paper. The dynamical properties of the new hyperchaotic system were analyzed terms of finding equilibrium points, phase portraits, Lyapunov exponents, Kaplan-Yorke dimension, dissipativity, etc. We showed that the new hyperchaotic system has no equilibrium point and hence it exhibits a hidden attractor. We also demonstrated that the new hyperchaos two-scroll system has multi-stability by the coexistence of hyperchaotic attractors for different values of initial conditions. As a control application, we applied integral sliding mode control to derive new results for the hyperchaos synchronization of the new 4-D multi-stable hyperchaotic two-scroll system.

References

- [1] Vaidyanathan S and Volos C 2017 *Advances and Applications in Chaotic Systems* (Berlin: Springer)
- [2] Pham V T, Vaidyanathan S, Volos C and Kapitaniak T 2018 *Nonlinear Dynamical Systems with Self-Excited and Hidden Attractors* (Berlin: Springer)
- [3] Vaidyanathan S, Azar A T, Rajagopal K, Sambas A, Kacar S and Cavusoglu U 2018 *International Journal of Simulation and Process Modelling* **13** 281-296
- [4] Vaidyanathan S, Volos C K, Rajagopal K, Kyprianidis I M and Stouboulos I N 2015 *Journal of Engineering Science and Technology Review* **8** 74-82
- [5] Rasappan S and Vaidyanathan S 2012 *Far East Journal of Mathematical Sciences* **67** 265-287
- [6] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 622-631
- [7] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 974-981
- [8] Vandermeer J and Perfecto I 2017 *Agroecology and Sustainable Food Systems* **41** 697-722
- [9] Pal N, Samanta S and Rana S 2017 *International Journal of Applied and Computational Mathematics* **3** 3615-3644
- [10] Chang L and Jin Z 2018 *Applied Mathematics and Computation* **316** 138-154
- [11] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 167-177
- [12] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 956-963
- [13] Tomita K 1982 *Journal of Theoretical Biology* **99** 111-118
- [14] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 106-116
- [15] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 156-166
- [16] Din Q, Shabbir M S, Khan M A and Ahmad K 2019 *Journal of Biological Dynamics* **13** 481-501

- [17] Njitacke Z T and Kengne J 2018 *AEU-International J. Electronics and Communications* **93** 242-252
- [18] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 946-955
- [19] Saad M, Safieddine A and Sultan R 2018 *Journal of Physical Chemistry A* **122** 6043-6047
- [20] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 159-171
- [21] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 740-749
- [22] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 146-158
- [23] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 669-683
- [24] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 209-221
- [25] Faust O, Acharya U R, Adeli H and Adeli A 2015 *Seizure* **26** 56-64
- [26] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 964-973
- [27] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 818-827
- [28] Maggs J E, Rhodes T L and Morales G J 2015 *Plasma Physics and Controlled Fusion* **57** 045004
- [29] Hellen E H and Volkov E 2018 *Communications in Nonlinear Science and Numerical Simulation* **62** 462-479
- [30] Vaidyanathan S 2013 *Lecture Notes in Electrical Engineering* **131** 319-327
- [31] Vaidyanathan S 2015 *International Journal of Modelling, Identification and Control* **23** 380-392
- [32] Vaidyanathan S and Rajagopal K 2011 *Communications in Computer and Information Science* **205** 193-202
- [33] Vaidyanathan S 2012 *Lecture Notes of the Institute for Computer Sciences, Social-Informatics and Telecommunications Engineering* **85** 124-133
- [34] Vaidyanathan S, Volos C and Pham V T 2015 *Studies in Computational Intelligence* **576** 571-590
- [35] Pham V T, Vaidyanathan S, Volos C K, Jafari S, Kuznetsov N V and Hoang T M 2016 *European Physical Journal: Special Topics* **225** 127-136
- [36] Xu Q, Zhang Q, Jiang T, Bao B and Chen M 2018 *Circuit World* **44** 108-114
- [37] Vaidyanathan S, Sambas A, Mamat M and Sanjaya W S M 2017 *Archives of Control Sciences* **27** 541-554
- [38] Singh J P, Lochan K, Kuznetsov N V and Roy B K 2017 *Nonlinear Dynamics* **90** 1277-1299
- [39] Wang Y, Mou Y and Zhang J 2018 *Journal of Harbin Engineering University* **39** 584-593
- [40] Mansour S M B, Sundarapandian V and Naceur S M 2016 *International Journal of Control Theory and Applications* **9** 37-54
- [41] Vaidyanathan S and Rajagopal K 2017 *International Journal of Simulation and Process Modelling* **12** 165-178
- [42] Dou Y, Liu X, Fan H and Li M 2017 *Optik* **145** 456-464
- [43] Vaidyanathan S, Sambas A, Mamat M and Sanjaya W S M 2017 *International Journal of Modelling, Identification and Control* **28** 153-166
- [44] Idowu B A, Vaidyanathan S, Sambas A, Olusola O I and Onma O S 2018 *Studies in Systems, Decision and Control* **133** 271-295
- [45] Tacha O I, Volos C K, Kyprianidis I M, Stouboulos I N, Vaidyanathan S and Pham V T 2016 *Applied Mathematics and Computation* **276** 200-217
- [46] Volos C K, Pham V T, Vaidyanathan S, Kyprianidis I M and Stouboulos I N 2015 *Journal of Engineering Science and Technology Review* **8** 142-151
- [47] Daltzis P, Vaidyanathan S, Pham V T, Volos C, Nistazakis E. and Tombras G. 2018 *Circuits, Systems, and Signal Processing* **37** 613-615
- [48] Sambas A, Vaidyanathan S, Mamat M and Mada Sanjaya W S 2018 *Studies in Systems, Decision and Control* **133** 365-373
- [49] Pham V T, Jafari S, Volos C, Giakoumis A, Vaidyanathan S and Kapitaniak T 2016 *IEEE Transactions on Circuits and Systems II: Express Briefs* **63** 878-882

- [50] Sambas A, Vaidyanathan S, Zhang S, Zeng Y, Mohamed M A and Mamat M 2019 *IEEE Access* **7** 115454-115462
- [51] Arabyani H and Nik H S 2016 *International Journal of Modelling, Identification and Control* **25** 138-144
- [52] Ouannas A, Grassi G, Ziar T and Odibat Z 2017 *Optik* **136** 513-523
- [53] Mahmoud G M, Mahmoud E E and Arafa A A 2015 *Nonlinear Dynamics* **80** 855-869
- [54] Vaidyanathan S, Dolvis L G, Jacques K, Lien C H and Sambas A 2019 *International Journal of Modelling, Identification and Control* **32** 30-45
- [55] Vaidyanathan S, Azar A T and Boulkroune A 2018 *International Journal of Automation and Control* **12** 5-26
- [56] Wolf A, Swift J B, Swinney H L and Vastano J A 1985 *Physica D* **16** 285-317

PAPER • OPEN ACCESS

A New 4-D Multi-Stable Hyperchaotic Two-Scroll System with No-Equilibrium and its Hyperchaos Synchronization

To cite this article: S. Vaidyanathan *et al* 2020 *J. Phys.: Conf. Ser.* **1477** 022018

View the [article online](#) for updates and enhancements.

You may also like

- [Synchronization and anti-synchronization of a new hyperchaotic Lü system with uncertain parameters via the passive control technique](#)
Xiaobing Zhou, Bing Kong and Haiyan Ding
- [Dynamic analysis of a fractional-order hyperchaotic system and its application in image encryption](#)
Qianqian Shi, Xinlei An, Li Xiong et al.
- [A new hyperchaotic complex system and its synchronization realization](#)
Zhengfeng Li, Fangfang Zhang, Xue Zhang et al.

A New 4-D Multi-Stable Hyperchaotic Two-Scroll System with No-Equilibrium and its Hyperchaos Synchronization

S. Vaidyanathan^{1,*}, C-H Lien², W. Fuadi³, Mujiarto⁴, M. Mamat⁵ and Subiyanto⁶

¹ Research and Development Centre, Vel Tech University, Avadi, Chennai, India

² Department of Marine Engineering, National Kaohsiung University of Science and Technology, Kaohsiung, 811, Taiwan, R.O.C.

³ Department of Informatic, Universitas Malikussaleh, Aceh Utara, Indonesia

⁴ Department of Mechanical Engineering, Universitas Muhammadiyah Tasikmalaya, Indonesia

⁵ Faculty of Informatics and Computing, Universiti Sultan Zainal Abidin, Kuala Terengganu, Malaysia

⁶ Department of Marine Science, Faculty of Fishery and Marine Science, Universitas Padjadjaran, Indonesia

*sundarvtu@gmail.com

Abstract. A new 4-D multi-stable hyperchaotic two-scroll system with four quadratic nonlinearities is proposed in this paper. The dynamical properties of the new hyperchaotic system are described in terms of finding equilibrium points, phase portraits, Lyapunov exponents, Kaplan-Yorke dimension, dissipativity, etc. We discover that the new hyperchaotic system has no equilibrium point and hence it exhibits a hidden attractor. Furthermore, we show that the new hyperchaos system has multi-stability by the coexistence of hyperchaotic attractors for different values of initial conditions. As a control application, we use integral sliding mode control (ISM) to derive new results for the hyperchaos synchronization of the new 4-D multi-stable hyperchaotic two-scroll system with hidden attractor.

1. Introduction

Chaos theory deals with nonlinear dynamical systems exhibiting high sensitivity to small changes in initial conditions [1-2]. Mathematically, chaotic systems are characterized by the presence of at least one positive Lyapunov exponent. Chaotic systems are very useful in many applications in science and engineering such as weather systems [3-5], ecology [6-10], neurons [11-12], biology [13-16], cellular neural networks [17-18], chemical reactors [19-24], brain waves [25-26], Tokamak systems [27-28], oscillators [29-35], encryption [36-44], finance systems [45-46], circuits [47-50], etc.

Hyperchaotic systems are defined as nonlinear dynamical systems having two or more positive Lyapunov exponents [1-2]. They exhibit more complex behaviour than chaotic dynamical systems as the trajectories of hyperchaotic systems can expand in two different directions corresponding to the two positive Lyapunov exponents. Many new hyperchaotic systems with special behaviour have been reported in the literature such as hyperchaotic Lorenz system [51], hyperchaotic Chen system [52], hyperchaotic Lü system [53], hyperchaotic Vaidyanathan systems [54-55], etc.



In this work, we report a new hyperchaotic two-scroll system with no equilibrium point. Thus, the new hyperchaos system belongs to the new class of hyperchaotic systems with *hidden attractors* [2].

We show that the new 4-D hyperchaotic system exhibits a two-scroll attractor. We analyze the dynamical properties of the new hyperchaotic two-scroll system with phase portraits, Lyapunov exponents, Kaplan-Yorke dimension, dissipativity, etc.

Section 2 describes the dynamics of the new hyperchaotic two-wing system, its phase plots and Lyapunov exponents. Section 3 describes the dynamic analysis of the new hyperchaotic two-wing system. We show that the new hyperchaos system exhibits multi-stability and this is confirmed by the coexistence of two different hyperchaotic attractors for different initial conditions. Section 4 describes the hyperchaos synchronization of the new hyperchaos systems using sliding mode control. Section 5 draws the main conclusions of this research work.

2. A New Hyperchaotic Two-Scroll system with No Equilibrium Point

In this work, we report a new 4-D dynamical system given by

$$\begin{cases} \dot{x}_1 = a(x_2 - x_1) + x_2x_3 + x_4 \\ \dot{x}_2 = bx_2 - cx_1x_3 - px_1^2 + x_4 \\ \dot{x}_3 = x_1x_2 - d \\ \dot{x}_4 = -x_1 - x_2 \end{cases} \quad (1)$$

where $X = (x_1, x_2, x_3, x_4)$ is the state and a, b, c, d, p are positive constants.

In this paper, we show that the 4-D system (1) is *hyperchaotic* for the parameter values

$$a = 16, b = 3, c = 8, d = 20, p = 0.1 \quad (2)$$

Using Wolf's algorithm [56], the Lyapunov exponents of the system (1) for the parameter set $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and the initial state $X(0) = (0.2, 0.2, 0.2, 0.2)$ were found as

$$LE_1 = 3.0085, LE_2 = 0.0642, LE_3 = 0, LE_4 = -16.0506 \quad (3)$$

Thus, the 4-D system (1) is hyperchaotic with two positive Lyapunov exponents.

The high value of LE_1 over 3 indicates the highly complex chaotic nature of the new 4-D hyperchaotic system (1).

It is noted that the sum of the Lyapunov exponents in (3) is negative.

$$LE_1 + LE_2 + LE_3 + LE_4 \approx -13 < 0 \quad (4)$$

This shows that the system (1) is dissipative with a hyperchaotic attractor.

The Kaplan-Yorke dimension of the system (1) is computed as

$$D_{KY} = 3 + \frac{LE_1 + LE_2 + LE_3}{|LE_4|} = 3.1914 \quad (5)$$

Figure 1 shows the Lyapunov exponents of the 4-D dissipative hyperchaotic system (1) for the parameter set $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and initial state $X(0) = (0.2, 0.2, 0.2, 0.2)$.

Figures 2-5 show the 2-D phase portraits of the hyperchaotic system (1) for the parameter set $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and initial state $X(0) = (0.2, 0.2, 0.2, 0.2)$. From the phase plots, we see that the 4-D system (1) has a *hyperchaotic two-scroll attractor*.

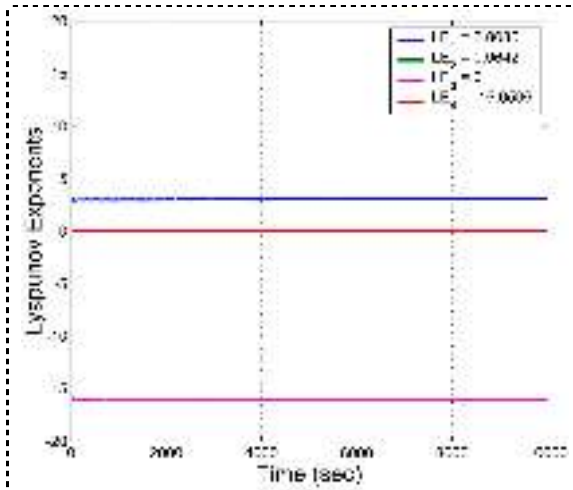


Figure 1. Lyapunov exponents of the hyperchaotic two-scroll system (1) for the parameter set $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and initial state $X(0) = (0.2, 0.2, 0.2, 0.2)$

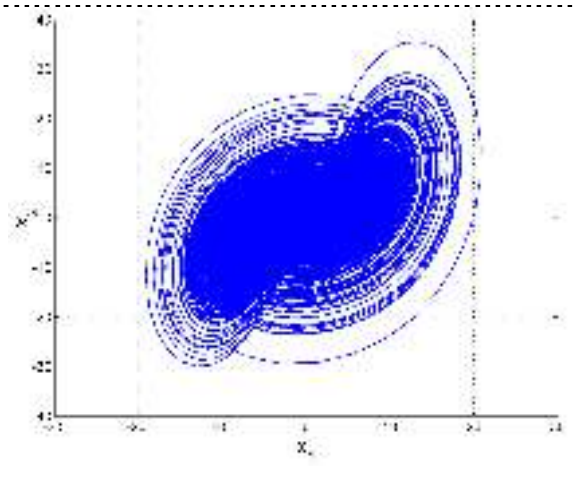


Figure 2. MATLAB plot showing the 2-D phase portrait of the hyperchaotic two-wing system (1) in the (x_1, x_2) -plane for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and $X(0) = (0.2, 0.2, 0.2, 0.2)$

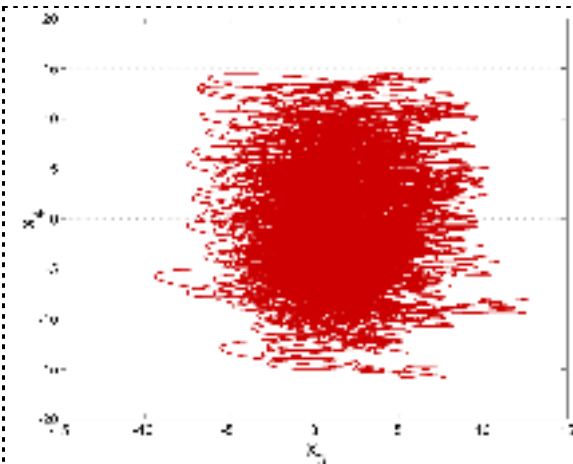


Figure 3. MATLAB plot showing the 2-D phase portrait of the hyperchaotic two-wing system (1) in the (x_2, x_3) -plane for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and $X(0) = (0.2, 0.2, 0.2, 0.2)$

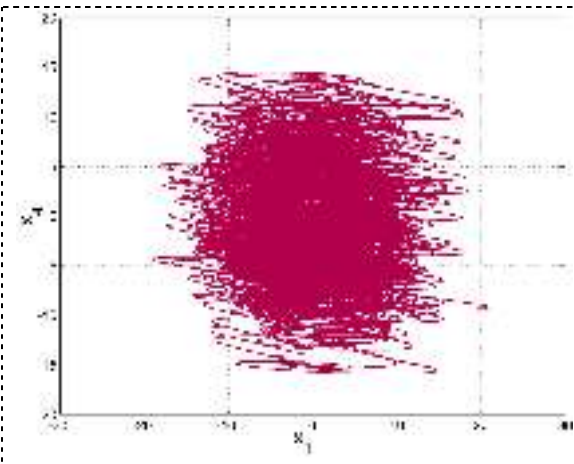


Figure 4. MATLAB plot showing the 2-D phase portrait of the hyperchaotic two-wing system (1) in the (x_3, x_4) -plane for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and $X(0) = (0.2, 0.2, 0.2, 0.2)$

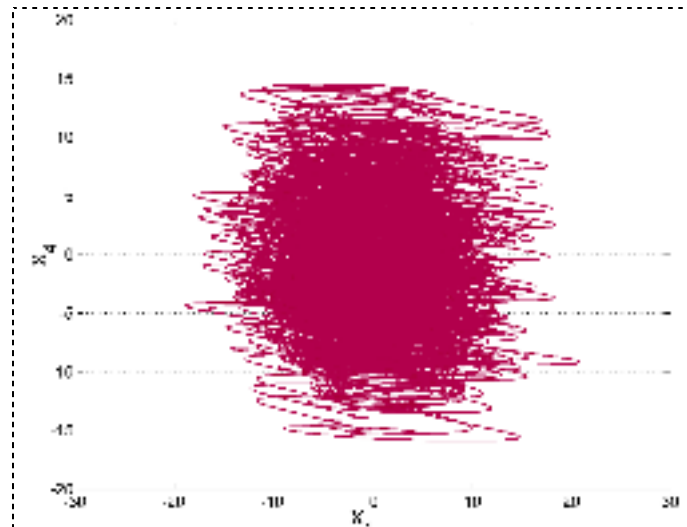


Figure 5. MATLAB plot showing the 2-D phase portrait of the hyperchaotic two-wing system (1) in the (x_1, x_4) -plane for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and $X(0) = (0.2, 0.2, 0.2, 0.2)$

The equilibrium points of the new hyperchaotic system (1) are obtained by solving the system

$$a(x_2 - x_1) + x_2x_3 + x_4 = 0 \quad (6a)$$

$$bx_2 - cx_1x_3 - px_1^2 + x_4 = 0 \quad (6b)$$

$$x_1x_2 - d = 0 \quad (6c)$$

$$-x_1 - x_2 = 0 \quad (6d)$$

From (6d), we deduce that $x_1 = -x_2$.

Substituting above in (6c), we get $-x_2^2 - d = 0$ or

$$x_2^2 = -d \quad (7)$$

Since $d > 0$, the equation (7) does not admit any real solution.

Thus, the new 4-D hyperchaotic two-scroll system does not have any equilibrium point.

Hence, we conclude that the 4-D hyperchaotic system (1) has *hidden* attractor [2].

3. Dynamic Analysis for the New Hyperchaotic System

3.1 Dissipativity

The 4-D hyperchaotic two-scroll system introduced in this work is given by the dynamics

$$\begin{cases} \dot{x}_1 = a(x_2 - x_1) + x_2x_3 + x_4 = f_1(x_1, x_2, x_3, x_4) \\ \dot{x}_2 = bx_2 - cx_1x_3 - px_1^2 + x_4 = f_2(x_1, x_2, x_3, x_4) \\ \dot{x}_3 = x_1x_2 - d = f_3(x_1, x_2, x_3, x_4) \\ \dot{x}_4 = -x_1 - x_2 = f_4(x_1, x_2, x_3, x_4) \end{cases} \quad (8)$$

The divergence of the flow defined by the system (8) is

$$\frac{\partial f_1}{\partial x_1} + \frac{\partial f_2}{\partial x_2} + \frac{\partial f_3}{\partial x_3} + \frac{\partial f_4}{\partial x_4} = -(a - b), \quad (9)$$

which is negative for the chosen parameter values (2).

This show that the 4-D hyperchaotic system (8) is dissipative.

Hence, the trajectories of the 4-D system (8) evolve to lie within a bounded region of the phase space.

3.2 Multi-stability

Multistability means the coexistence of two or more attractors under different initial conditions but with the same parameter set. It is an interesting phenomenon and can usually be found in many nonlinear systems [2]. Multistability can lead to very complex behaviors in a dynamical system [2].

It is interesting that our system (1) can exhibit coexisting attractors when choosing different initial conditions. For example, when selecting $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ and the initial conditions $X_0 = (0.2, 0.2, 0.2, 0.2)$ (blue) and $Y_0 = (0.2, -0.2, 0.2, -0.2)$ (red), the 4-D hyperchaotic two-scroll system (1) displays coexisting hyperchaotic attractor (blue) and hyperchaotic attractor (red) as illustrated in Figures 6 and 7 respectively.

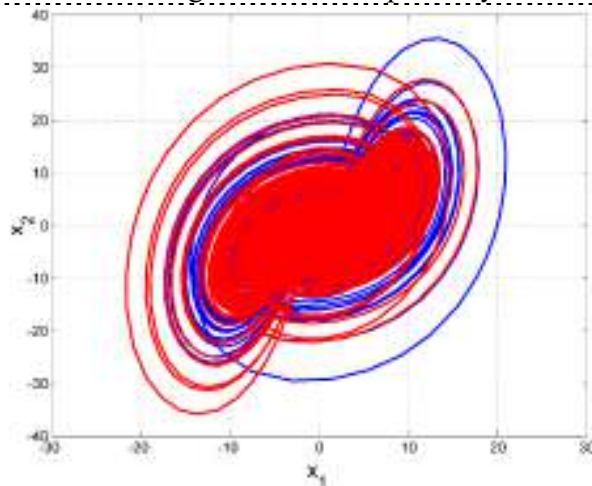


Figure 6. Multi-stability of the hyperchaotic system (1): Coexisting hyperchaotic attractors for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ in the (x_1, x_2) –plane. Blue color shows the hyperchaotic attractor of (1) with initial state $X_0 = (0.2, 0.2, 0.2, 0.2)$ and red color shows the hyperchaotic attractor of (1) with the initial state $Y_0 = (0.2, -0.2, 0.2, -0.2)$

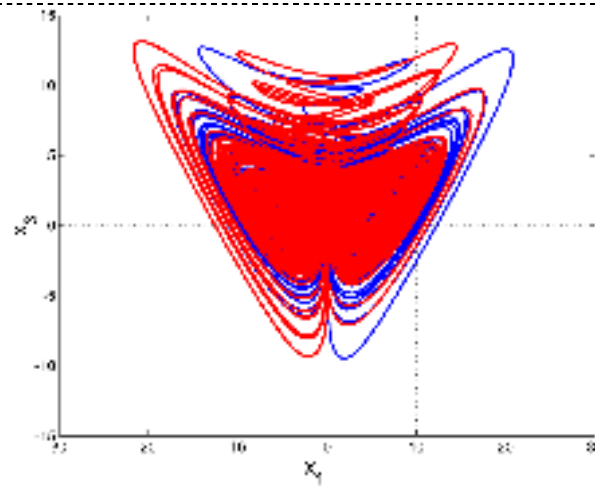


Figure 7. Multi-stability of the hyperchaotic system (1): Coexisting hyperchaotic attractors for $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$ in the (x_1, x_3) –plane. Blue color shows the hyperchaotic attractor of (1) with initial state $X_0 = (0.2, 0.2, 0.2, 0.2)$ and red color shows the hyperchaotic attractor of (1) with the initial state $Y_0 = (0.2, -0.2, 0.2, -0.2)$

4. Hyperchaos Synchronization of the New Hyperchaotic Two-Scroll System via Integral Sliding Mode Control

This section derives new results for the hyperchaos synchronization of a pair of new hyperchaotic systems taken as master and slave systems using integral sliding mode control [2].

As the master system, we consider the new hyperchaotic two-scroll system given by

$$\begin{cases} \dot{x}_1 = a(x_2 - x_1) + x_2x_3 + x_4 \\ \dot{x}_2 = bx_2 - cx_1x_3 - px_1^2 + x_4 \\ \dot{x}_3 = x_1x_2 - d \\ \dot{x}_4 = -x_1 - x_2 \end{cases} \quad (10)$$

where x_1, x_2, x_3, x_4 are the states and a, b, c, d, p are system parameters.

As the slave system, we consider the new hyperchaotic two-scroll system with controls given by

$$\begin{cases} \dot{y}_1 = a(y_2 - y_1) + y_2 y_3 + y_4 + u_1 \\ \dot{y}_2 = b y_2 - c y_1 y_3 - p y_1^2 + y_4 + u_2 \\ \dot{y}_3 = y_1 y_2 - d + u_3 \\ \dot{y}_4 = -y_1 - y_2 + u_4 \end{cases} \quad (11)$$

where y_1, y_2, y_3, y_4 are the states and u_1, u_2, u_3, u_4 are the sliding controls to be found.

The synchronization error between the new hyperchaotic systems (10) and (11) is defined as

$$\begin{cases} e_1 = y_1 - x_1 \\ e_2 = y_2 - x_2 \\ e_3 = y_3 - x_3 \\ e_4 = y_4 - x_4 \end{cases} \quad (12)$$

Then we obtain the error dynamics as follows:

$$\begin{cases} \dot{e}_1 = a(e_2 - e_1) + e_4 + y_2 y_3 - x_2 x_3 + u_1 \\ \dot{e}_2 = b e_2 + e_4 - c(y_1 y_3 - x_1 x_3) - p(y_1^2 - x_1^2) + u_2 \\ \dot{e}_3 = y_1 y_2 - x_1 x_2 + u_3 \\ \dot{e}_4 = -e_1 - e_2 + u_4 \end{cases} \quad (13)$$

Based on the sliding mode control theory, the integral sliding surface of each error variable is defined as follows:

$$\begin{cases} s_1 = \left[\frac{d}{dt} + \lambda_1 \right] \left[\int_0^t e_1(\tau) d\tau \right] = e_1 + \lambda_1 \int_0^t e_1(\tau) d\tau \\ s_2 = \left[\frac{d}{dt} + \lambda_2 \right] \left[\int_0^t e_2(\tau) d\tau \right] = e_2 + \lambda_2 \int_0^t e_2(\tau) d\tau \\ s_3 = \left[\frac{d}{dt} + \lambda_3 \right] \left[\int_0^t e_3(\tau) d\tau \right] = e_3 + \lambda_3 \int_0^t e_3(\tau) d\tau \\ s_4 = \left[\frac{d}{dt} + \lambda_4 \right] \left[\int_0^t e_4(\tau) d\tau \right] = e_4 + \lambda_4 \int_0^t e_4(\tau) d\tau \end{cases} \quad (14)$$

The derivative of each equation in (14) yields

$$\begin{cases} \dot{s}_1 = \dot{e}_1 + \lambda_1 e_1 \\ \dot{s}_2 = \dot{e}_2 + \lambda_2 e_2 \\ \dot{s}_3 = \dot{e}_3 + \lambda_3 e_3 \\ \dot{s}_4 = \dot{e}_4 + \lambda_4 e_4 \end{cases} \quad (15)$$

The Hurwitz condition is fulfilled if $\lambda_i, (i = 1, 2, 3, 4)$ are positive constants.

Based on the exponential reaching law of sliding mode control theory, we set

$$\begin{cases} \dot{s}_1 = -\eta_1 \operatorname{sgn}(s_1) - k_1 s_1 \\ \dot{s}_2 = -\eta_2 \operatorname{sgn}(s_2) - k_2 s_2 \\ \dot{s}_3 = -\eta_3 \operatorname{sgn}(s_3) - k_3 s_3 \\ \dot{s}_4 = -\eta_4 \operatorname{sgn}(s_4) - k_4 s_4 \end{cases} \quad (16)$$

Comparing equations (15) and (16), we get

$$\begin{cases} -\eta_1 \operatorname{sgn}(s_1) - k_1 s_1 = \dot{e}_1 + \lambda_1 e_1 \\ -\eta_2 \operatorname{sgn}(s_2) - k_2 s_2 = \dot{e}_2 + \lambda_2 e_2 \\ -\eta_3 \operatorname{sgn}(s_3) - k_3 s_3 = \dot{e}_3 + \lambda_3 e_3 \\ -\eta_4 \operatorname{sgn}(s_4) - k_4 s_4 = \dot{e}_4 + \lambda_4 e_4 \end{cases} \quad (17)$$

Using Eq. (13), we can rewrite Eq. (17) as follows:

$$\begin{cases} -\eta_1 \operatorname{sgn}(s_1) - k_1 s_1 = a(e_2 - e_1) + e_4 + y_2 y_3 - x_2 x_3 + u_1 + \lambda_1 e_1 \\ -\eta_2 \operatorname{sgn}(s_2) - k_2 s_2 = b e_2 + e_4 - c(y_1 y_3 - x_1 x_3) - p(y_1^2 - x_1^2) + u_2 + \lambda_2 e_2 \\ -\eta_3 \operatorname{sgn}(s_3) - k_3 s_3 = y_1 y_2 - x_1 x_2 + u_3 + \lambda_3 e_3 \\ -\eta_4 \operatorname{sgn}(s_4) - k_4 s_4 = -e_1 - e_2 + u_4 + \lambda_4 e_4 \end{cases} \quad (18)$$

From (18), we obtain the required sliding mode control (SMC) laws are as follows:

$$\begin{cases} u_1 = -a(e_2 - e_1) - e_4 - y_2 y_3 + x_2 x_3 - \lambda_1 e_1 - \eta_1 \operatorname{sgn}(s_1) - k_1 s_1 \\ u_2 = -b e_2 - e_4 + c(y_1 y_3 - x_1 x_3) + p(y_1^2 - x_1^2) - \lambda_2 e_2 - \eta_2 \operatorname{sgn}(s_2) - k_2 s_2 \\ u_3 = -y_1 y_2 + x_1 x_2 - \lambda_3 e_3 - \eta_3 \operatorname{sgn}(s_3) - k_3 s_3 \\ u_4 = e_1 + e_2 - \lambda_4 e_4 - \eta_4 \operatorname{sgn}(s_4) - k_4 s_4 \end{cases} \quad (19)$$

Theorem 1. The integral sliding mode control law (19) renders global hyperchaos synchronization for the new hyperchaotic two-scroll systems (10) and (11) for all initial conditions, where the constants $\lambda_1, \lambda_2, \lambda_3, \lambda_4, \eta_1, \eta_2, \eta_3, \eta_4, k_1, k_2, k_3, k_4$ are all positive.

Proof. This result is established with the help of Lyapunov stability theory [1-2].

We take the following quadratic Lyapunov function

$$V(s_1, s_2, s_3, s_4) = \frac{1}{2}(s_1^2 + s_2^2 + s_3^2 + s_4^2), \quad (20)$$

where s_1, s_2, s_3, s_4 are defined as in Eq. (14).

It is seen that the quadratic function V is positive definite and radially unbounded on R^4 .

The time-derivative of (20) is calculated as

$$\dot{V} = s_1 \dot{s}_1 + s_2 \dot{s}_2 + s_3 \dot{s}_3 + s_4 \dot{s}_4 = \sum_{i=1}^4 s_i \dot{s}_i \quad (21)$$

Substituting from Eq. (16) into Eq. (21), we get

$$\dot{V} = \sum_{i=1}^4 s_i [-\eta_i \operatorname{sgn}(s_i) - k_i s_i] = -\sum_{i=1}^4 [\eta_i |s_i| + k_i s_i^2] \quad (22)$$

Since $\eta_i > 0$ and $k_i > 0$ for $i = 1, 2, 3, 4$, we deduce from Eq. (22) that \dot{V} is a negative definite function on R^4 .

Thus, by Lyapunov stability theory, we conclude that $s_i(t) \rightarrow 0$ as $t \rightarrow \infty$ for $i = 1, 2, 3, 4$.

Hence, we conclude that $e_i(t) \rightarrow 0$ as $t \rightarrow \infty$ for $i = 1, 2, 3, 4$.

This completes the proof. ■

For numerical simulations, we take the initial conditions as in the hyperchaotic case (2), viz. $(a, b, c, d, p) = (16, 3, 8, 20, 0.1)$.

We consider the sliding constants as

$$\lambda_i = 0.2, \eta_i = 0.2, k_i = 22 \text{ for } i = 1, 2, 3, 4 \tag{23}$$

The initial state of the master system (10) is taken as

$$x_1(0) = 1.2, x_2(0) = 3.5, x_3(0) = 2.4, x_4(0) = 0.8 \tag{24}$$

The initial state of the slave system (11) is taken as

$$y_1(0) = 3.9, y_2(0) = 1.4, y_3(0) = 0.3, y_4(0) = 2.2 \tag{25}$$

Figures 8-11 show the complete synchronization of the new hyperchaotic systems (10) and (11).

Figure 12 shows the time-history of the synchronization errors e_1, e_2, e_3, e_4 .

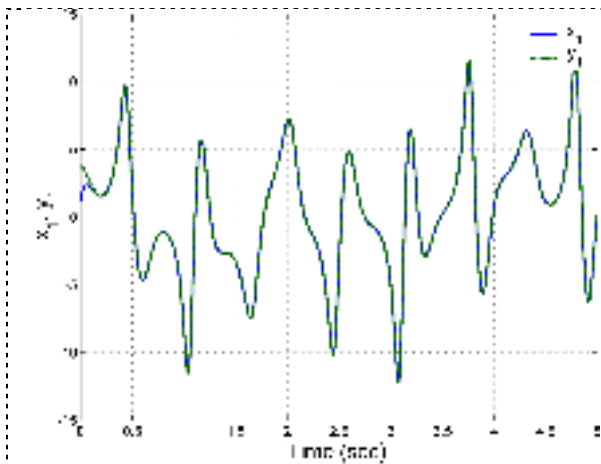


Figure 8. Synchronization between the states x_1 and y_1 of the hyperchaotic systems (10) and (11)

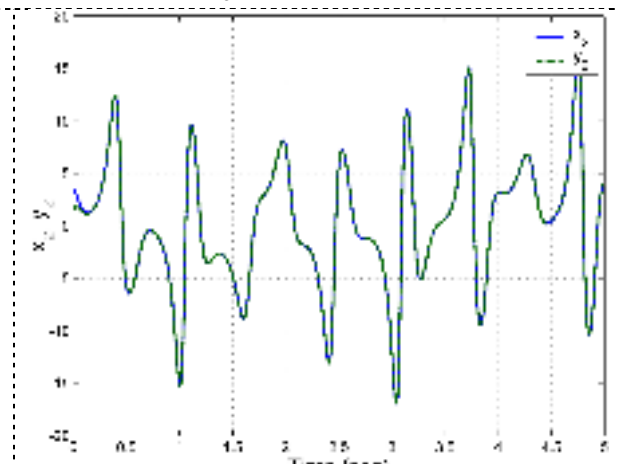


Figure 9. Synchronization between the states x_2 and y_2 of the hyperchaotic systems (10) and (11)

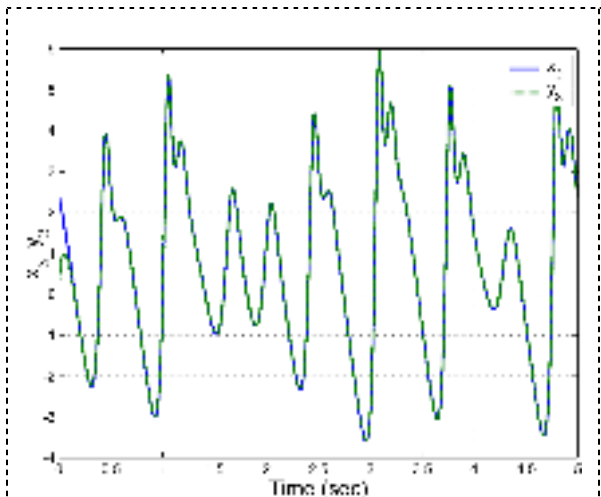


Figure 10. Synchronization between the states x_3 and y_3 of the hyperchaotic systems (10) and (11)

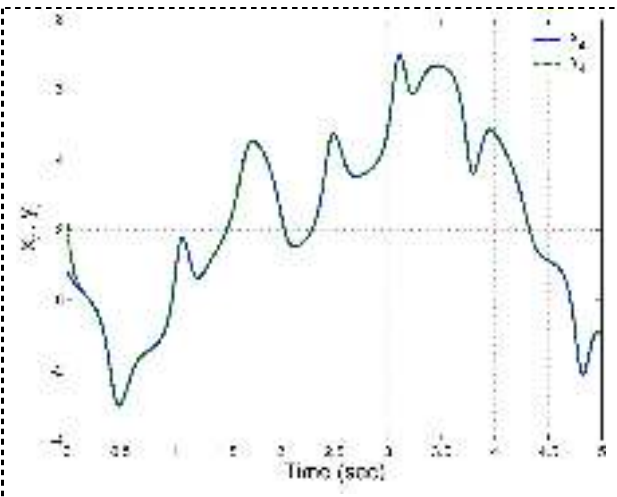


Figure 11. Synchronization between the states x_4 and y_4 of the hyperchaotic systems (10) and (11)

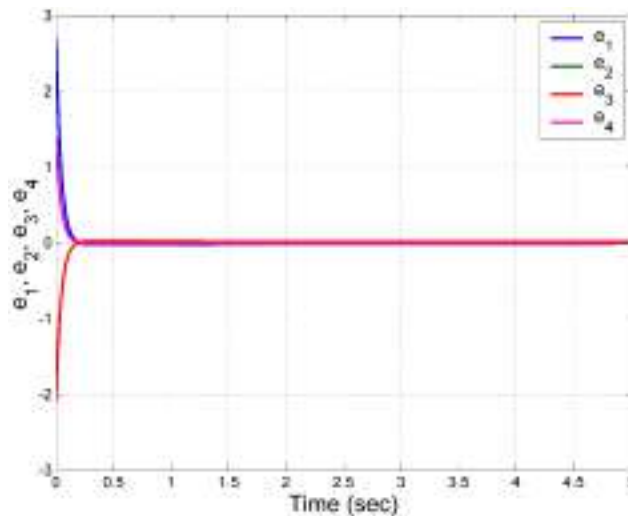


Figure 12. Time-history of the synchronization error between the hyperchaotic systems (10) and (11)

5. Conclusions

We reported a new 4-D multi-stable hyperchaotic two-scroll system with four quadratic nonlinearities in this paper. The dynamical properties of the new hyperchaotic system were analyzed terms of finding equilibrium points, phase portraits, Lyapunov exponents, Kaplan-Yorke dimension, dissipativity, etc. We showed that the new hyperchaotic system has no equilibrium point and hence it exhibits a hidden attractor. We also demonstrated that the new hyperchaos two-scroll system has multi-stability by the coexistence of hyperchaotic attractors for different values of initial conditions. As a control application, we applied integral sliding mode control to derive new results for the hyperchaos synchronization of the new 4-D multi-stable hyperchaotic two-scroll system.

References

- [1] Vaidyanathan S and Volos C 2017 *Advances and Applications in Chaotic Systems* (Berlin: Springer)
- [2] Pham V T, Vaidyanathan S, Volos C and Kapitaniak T 2018 *Nonlinear Dynamical Systems with Self-Excited and Hidden Attractors* (Berlin: Springer)
- [3] Vaidyanathan S, Azar A T, Rajagopal K, Sambas A, Kacar S and Cavusoglu U 2018 *International Journal of Simulation and Process Modelling* **13** 281-296
- [4] Vaidyanathan S, Volos C K, Rajagopal K, Kyprianidis I M and Stouboulos I N 2015 *Journal of Engineering Science and Technology Review* **8** 74-82
- [5] Rasappan S and Vaidyanathan S 2012 *Far East Journal of Mathematical Sciences* **67** 265-287
- [6] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 622-631
- [7] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 974-981
- [8] Vandermeer J and Perfecto I 2017 *Agroecology and Sustainable Food Systems* **41** 697-722
- [9] Pal N, Samanta S and Rana S 2017 *International Journal of Applied and Computational Mathematics* **3** 3615-3644
- [10] Chang L and Jin Z 2018 *Applied Mathematics and Computation* **316** 138-154
- [11] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 167-177
- [12] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 956-963
- [13] Tomita K 1982 *Journal of Theoretical Biology* **99** 111-118
- [14] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 106-116
- [15] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 156-166
- [16] Din Q, Shabbir M S, Khan M A and Ahmad K 2019 *Journal of Biological Dynamics* **13** 481-501

- [17] Njitacke Z T and Kengne J 2018 *AEU-International J. Electronics and Communications* **93** 242-252
- [18] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 946-955
- [19] Saad M, Safieddine A and Sultan R 2018 *Journal of Physical Chemistry A* **122** 6043-6047
- [20] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 159-171
- [21] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 740-749
- [22] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 146-158
- [23] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 669-683
- [24] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 209-221
- [25] Faust O, Acharya U R, Adeli H and Adeli A 2015 *Seizure* **26** 56-64
- [26] Vaidyanathan S 2015 *International Journal of PharmTech Research* **8** 964-973
- [27] Vaidyanathan S 2015 *International Journal of ChemTech Research* **8** 818-827
- [28] Maggs J E, Rhodes T L and Morales G J 2015 *Plasma Physics and Controlled Fusion* **57** 045004
- [29] Hellen E H and Volkov E 2018 *Communications in Nonlinear Science and Numerical Simulation* **62** 462-479
- [30] Vaidyanathan S 2013 *Lecture Notes in Electrical Engineering* **131** 319-327
- [31] Vaidyanathan S 2015 *International Journal of Modelling, Identification and Control* **23** 380-392
- [32] Vaidyanathan S and Rajagopal K 2011 *Communications in Computer and Information Science* **205** 193-202
- [33] Vaidyanathan S 2012 *Lecture Notes of the Institute for Computer Sciences, Social-Informatics and Telecommunications Engineering* **85** 124-133
- [34] Vaidyanathan S, Volos C and Pham V T 2015 *Studies in Computational Intelligence* **576** 571-590
- [35] Pham V T, Vaidyanathan S, Volos C K, Jafari S, Kuznetsov N V and Hoang T M 2016 *European Physical Journal: Special Topics* **225** 127-136
- [36] Xu Q, Zhang Q, Jiang T, Bao B and Chen M 2018 *Circuit World* **44** 108-114
- [37] Vaidyanathan S, Sambas A, Mamat M and Sanjaya W S M 2017 *Archives of Control Sciences* **27** 541-554
- [38] Singh J P, Lochan K, Kuznetsov N V and Roy B K 2017 *Nonlinear Dynamics* **90** 1277-1299
- [39] Wang Y, Mou Y and Zhang J 2018 *Journal of Harbin Engineering University* **39** 584-593
- [40] Mansour S M B, Sundarapandian V and Naceur S M 2016 *International Journal of Control Theory and Applications* **9** 37-54
- [41] Vaidyanathan S and Rajagopal K 2017 *International Journal of Simulation and Process Modelling* **12** 165-178
- [42] Dou Y, Liu X, Fan H and Li M 2017 *Optik* **145** 456-464
- [43] Vaidyanathan S, Sambas A, Mamat M and Sanjaya W S M 2017 *International Journal of Modelling, Identification and Control* **28** 153-166
- [44] Idowu B A, Vaidyanathan S, Sambas A, Olusola O I and Onma O S 2018 *Studies in Systems, Decision and Control* **133** 271-295
- [45] Tacha O I, Volos C K, Kyprianidis I M, Stouboulos I N, Vaidyanathan S and Pham V T 2016 *Applied Mathematics and Computation* **276** 200-217
- [46] Volos C K, Pham V T, Vaidyanathan S, Kyprianidis I M and Stouboulos I N 2015 *Journal of Engineering Science and Technology Review* **8** 142-151
- [47] Daltzis P, Vaidyanathan S, Pham V T, Volos C, Nistazakis E. and Tombras G. 2018 *Circuits, Systems, and Signal Processing* **37** 613-615
- [48] Sambas A, Vaidyanathan S, Mamat M and Mada Sanjaya W S 2018 *Studies in Systems, Decision and Control* **133** 365-373
- [49] Pham V T, Jafari S, Volos C, Giakoumis A, Vaidyanathan S and Kapitaniak T 2016 *IEEE Transactions on Circuits and Systems II: Express Briefs* **63** 878-882

- [50] Sambas A, Vaidyanathan S, Zhang S, Zeng Y, Mohamed M A and Mamat M 2019 *IEEE Access* **7** 115454-115462
- [51] Arabyani H and Nik H S 2016 *International Journal of Modelling, Identification and Control* **25** 138-144
- [52] Ouannas A, Grassi G, Ziar T and Odibat Z 2017 *Optik* **136** 513-523
- [53] Mahmoud G M, Mahmoud E E and Arafa A A 2015 *Nonlinear Dynamics* **80** 855-869
- [54] Vaidyanathan S, Dolvis L G, Jacques K, Lien C H and Sambas A 2019 *International Journal of Modelling, Identification and Control* **32** 30-45
- [55] Vaidyanathan S, Azar A T and Boulkroune A 2018 *International Journal of Automation and Control* **12** 5-26
- [56] Wolf A, Swift J B, Swinney H L and Vastano J A 1985 *Physica D* **16** 285-317